PRODUCT SUBMITTAL SHEET

For more information or questions, please contact:
Super Stud: technical@buysuperstud.com
EB Metal US: technical@ebmetal.us

362S162-33 (Standard Punch)


Product Description: 3-5/8" Stud STR 20GA (1-5/8" Flange, 33 mil)


Coating: G60 (standard), G90 (Available)


Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	3.625 in.	Yield Strength, Fy	33 ksi
Flange Width	1.625 in.	Design Thickness	0.0346 in.
Lip Length	0.500 in.	Min. Steel Thickness	0.0329 in.

GROSS PROPERTIES		
Area (in^2)	Total cross-sectional steel area	0.262
Weight (lb/ft)	Linear weight per foot	0.89
Ix (in^4)	Moment of inertia about the x-axis	0.551
Sx (in^3)	Section modulus about the x-axis	0.304
Rx (in)	Radius of gyration about the x-axis	1.450
Iy (in^4)	Moment of inertia about the y-axis	0.099
Ry (in)	Radius of gyration about the y-axis	0.616
EFFECTIVE PROPERTIES		
Ix (in^3)	Effective moment of inertia (x-axis)	0.551
Sx (in^3)	Effective section modulus (x-axis)	0.275
Ma (in-k)	Allowable bending moment-effective section modulus	5.44
Mad (in-k)	Allowable bending moment-distortional bucking	5.20
Va_g (lb)	Allowable shear force in web	1024
Va_{net} (lb)	Allowable strong axis sheer at punchout	521
TORSIONAL PROPERTIES		
J x 1000 (in^4)	St. Venant torsional constant	0.105
Cw (in^6)	Warping constant	0.297
Xo (in)	Distance from shear center to centroid	-1.308
m (in)	Distance from shear center to mid-plane of web	0.789
Ro (in)	Polar radius of gyration	2.048
Beta	Torsional Flexural Constant	0.592

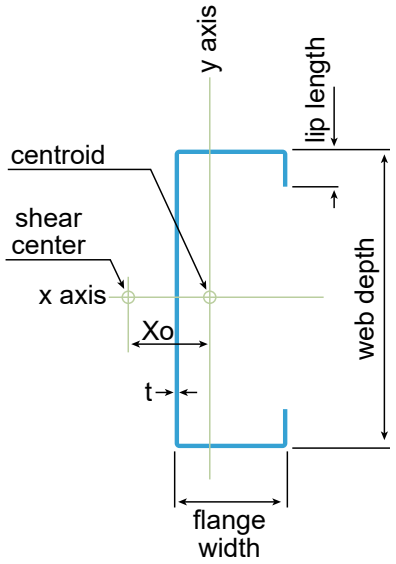



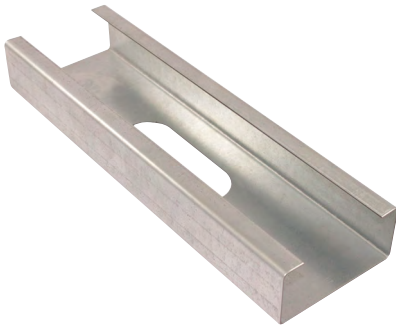

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Codes & Standards:

- **Structural Members**
  - ASTM C955
  - AISI S240
  - Installed per ASTM C1007
- **Material Standards**
  - ASTM A1003/A1003M
  - ASTM A653/A653M
- **Design Standards**
  - AISI S100-16 (2020) w/S2-20
- **Building Codes**
  - International Building Code (IBC) 2006–2024

- **Sustainability & Compliance:**
  - SFIA Quality Certified Manufacturing
  - Industry-Wide EPD Participant
  - HPD Documentation Available Upon Request
  - LEED Documentation Available Upon Request
  - Buy America / Build America (BABA) Documentation Available Upon Request
  - Manufactured in USA

NEW HAMPSHIRE | NEW JERSEY | MISSISSIPPI
Stronger **Together.**