

362T125-18 Track


Product Line: 362EDT125-18- The Edge™ Performance 20 (18 mil)

Coating: G40 (standard), G60 (special order)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	3.625 in.	Yield Strength, Fy	55 ksi
Leg Width	1.25 in.	Design Thickness	0.0188 in.
		Min. Steel Thickness	0.0179 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.1160
Weight (lb/ft)	Linear weight per foot	0.394
I _x (in ⁴)	Moment of inertia about the x-axis	0.2403
S _x (in ³)	Section modulus about the x-axis	0.1284
R _x (in)	Radius of gyration about the x-axis	1.439
I _y (in ⁴)	Moment of inertia about the y-axis	0.0167
R _y (in)	Radius of gyration about the y-axis	0.3796
EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0308
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.1351
S _{xe} (in ³)	Effective section modulus (x-axis)	0.0539
Ma (in-k)	Allowable moment capacity	1.0781
V _y (lb)	Allowable shear force in web	162
TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0137
C _w (in ⁶)	Warping constant	0.0411
X _o (in)	Distance from shear center to centroid	0.6666
R _o (in)	Polar radius of gyration	1.6310
Beta	Torsional Flexural Constant	0.8330

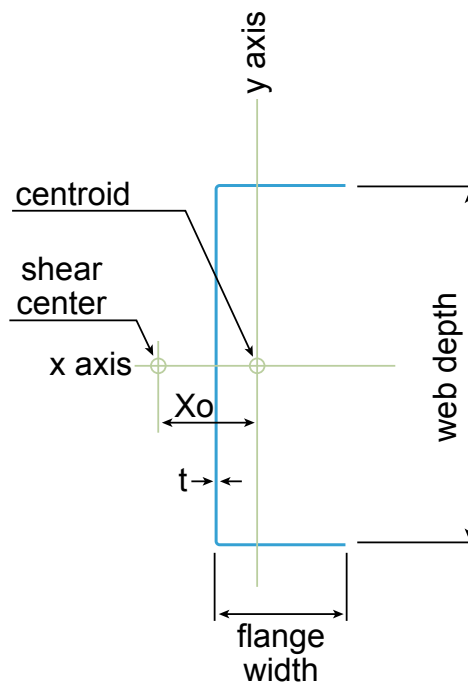

CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006 – 2024
- Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U419, V438, V489, V498, W433, W440
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure

For LEED Letter requests please submit through: www.buysuperstud.com