



# Super Stud Building Products - Product Submittal

Technical Services: [technical@buysuperstud.com](mailto:technical@buysuperstud.com)

800-477-7883  
[buysuperstud.com](http://buysuperstud.com)

New Jersey  
2960 Woodbridge Avenue  
Edison, NJ 08837  
732-662-6200

Mississippi  
53 W L Runnels Industrial Dr  
Hattiesburg, MS 39401  
601-584-7550

## Specification Section: 05.40.00 (Cold-Formed Metal Framing)

### 250S137-54 (33ksi) Standard Punch

54mil (16 ga) Coating: G60 (standard), G90 (special order)

#### Geometric Properties

|                      |           |                       |        |
|----------------------|-----------|-----------------------|--------|
| Web Depth            | 2.5 in    | Yield Strength, $F_y$ | 33 ksi |
| Flange Width         | 1.375 in  | Ultimate, $F_u$       | 45 ksi |
| Lip Length           | 0.375 in  | Punchout Width        | 1.5 in |
| Design Thickness     | 0.0566 in | Punchout Length       | 4.0 in |
| Min. Steel Thickness | 0.0538 in |                       |        |

#### Gross Section Properties

|                                        |                        |
|----------------------------------------|------------------------|
| Cross Sectional Area (A)               | 0.3158 in <sup>2</sup> |
| Product Weight per Linear Foot         | 1.0737 lb/ft           |
| Moment of Inertia ( $I_x$ )            | 0.3184 in <sup>4</sup> |
| Section Modulus ( $S_x$ )              | 0.2547 in <sup>3</sup> |
| Radius of Gyration ( $r_x$ )           | 1.0041 in              |
| Weak Axis Moment of Inertia ( $I_y$ )  | 0.0803 in <sup>4</sup> |
| Weak Axis Radius of Gyration ( $r_y$ ) | 0.5044 in              |
| Depth-to-Thickness Ratio (h/t)         | 39                     |

#### Effective Section Properties, Strong Axis

|                                                      |                        |
|------------------------------------------------------|------------------------|
| Effective Area ( $A_e$ )                             | 0.2719 in <sup>2</sup> |
| Moment of Inertia for Deflection ( $I_{xe}$ )        | 0.3164 in <sup>4</sup> |
| Section Modulus ( $S_{xe}$ )                         | 0.2531 in <sup>3</sup> |
| Allowable Bending Moment ( $M_a$ )                   | 5.7248 in-k            |
| Allowable Shear Force in Web (at Punchout) ( $V_y$ ) | 373 lb                 |

#### Torsional Properties

|                                                      |                        |
|------------------------------------------------------|------------------------|
| St. Venant Torsion Constant ( $J \times 1000$ )      | 0.3372 in <sup>4</sup> |
| Warping Constant ( $C_w$ )                           | 0.1072 in <sup>6</sup> |
| Distance from Shear Center to Neutral Axis ( $X_o$ ) | 1.1118 in              |
| Radius of Gyration ( $r_o$ )                         | 1.5807 in              |
| Torsional Flexural Constant (Beta)                   | 0.5053                 |

#### Codes and Standards

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC): 2006 – 2024

Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming

Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M

Galvanized coating: ASTM A653/A653M


Nonstructural: Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202

Meets ASTM C754 when installed properly in structure.

Structural: Members and tolerances: ASTM C955; AISI S240, AISI S201, AISI S202

Meets ASTM C1007 when installed properly in structure.

3<sup>rd</sup> party Certification

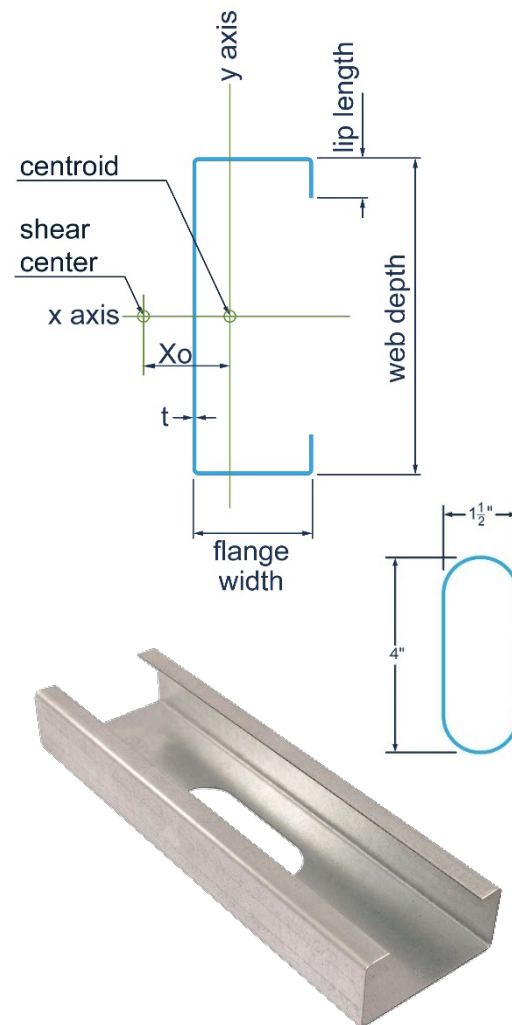

#### Structural Punchout

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Custom stiffened punchouts are available at tighter spacing to reduce thermal transmittance and increase accessibility. Contact Technical Services for additional punchout information.

#### Sustainability

For LEED letters contact Technical Services at [technical@buysuperstud.com](mailto:technical@buysuperstud.com) or visit



© 2025 Super Stud Building Products