



# Super Stud Building Products - Product Submittal

Technical Services: [technical@buysuperstud.com](mailto:technical@buysuperstud.com)

800-477-7883  
[buysuperstud.com](http://buysuperstud.com)

New Jersey  
2960 Woodbridge Avenue  
Edison, NJ 08837  
732-662-6200

Mississippi  
53 W L Runnels Industrial Dr  
Hattiesburg, MS 39401  
601-584-7550

## Specification Section: 05.40.00 (Cold-Formed Metal Framing)

### 800S162-54 (50ksi) Standard Punch

54mil (16 ga) Coating: G60 (standard), G90 (special order)

#### Geometric Properties

|                      |           |                       |        |
|----------------------|-----------|-----------------------|--------|
| Web Depth            | 8 in      | Yield Strength, $F_y$ | 50 ksi |
| Flange Width         | 1.625 in  | Ultimate, $F_u$       | 65 ksi |
| Lip Length           | 0.500 in  | Punchout Width        | 1.5 in |
| Design Thickness     | 0.0566 in | Punchout Length       | 4.0 in |
| Min. Steel Thickness | 0.0538 in |                       |        |

#### Gross Section Properties

|                                        |                        |
|----------------------------------------|------------------------|
| Cross Sectional Area (A)               | 0.6695 in <sup>2</sup> |
| Product Weight per Linear Foot         | 2.2763 lb/ft           |
| Moment of Inertia ( $I_x$ )            | 5.7363 in <sup>4</sup> |
| Section Modulus ( $S_x$ )              | 1.4341 in <sup>3</sup> |
| Radius of Gyration ( $r_x$ )           | 2.9270 in              |
| Weak Axis Moment of Inertia ( $I_y$ )  | 0.1947 in <sup>4</sup> |
| Weak Axis Radius of Gyration ( $r_y$ ) | 0.5392 in              |
| Depth-to-Thickness Ratio (h/t)         | 136                    |

#### Effective Section Properties, Strong Axis

|                                                      |                        |
|------------------------------------------------------|------------------------|
| Effective Area ( $A_e$ )                             | 0.3095 in <sup>2</sup> |
| Moment of Inertia for Deflection ( $I_{xe}$ )        | 5.2650 in <sup>4</sup> |
| Section Modulus ( $S_{xe}$ )                         | 1.2049 in <sup>3</sup> |
| Allowable Bending Moment ( $M_a$ )                   | 36.0749 in-k           |
| Allowable Shear Force in Web (at Punchout) ( $V_y$ ) | 2,091 lb               |

#### Torsional Properties

|                                                      |                        |
|------------------------------------------------------|------------------------|
| St. Venant Torsion Constant ( $J \times 1000$ )      | 0.7150 in <sup>4</sup> |
| Warping Constant ( $C_w$ )                           | 2.4154 in <sup>6</sup> |
| Distance from Shear Center to Neutral Axis ( $X_o$ ) | 0.9075 in              |
| Radius of Gyration ( $r_o$ )                         | 3.1116 in              |
| Torsional Flexural Constant (Beta)                   | 0.9149                 |

#### Codes and Standards

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC): 2006 – 2024

Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming

Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M

Galvanized coating: ASTM A653/A653M


Nonstructural: Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202

Meets ASTM C754 when installed properly in structure.

Structural: Members and tolerances: ASTM C955; AISI S240, AISI S201, AISI S202

Meets ASTM C1007 when installed properly in structure.

3<sup>rd</sup> party Certification

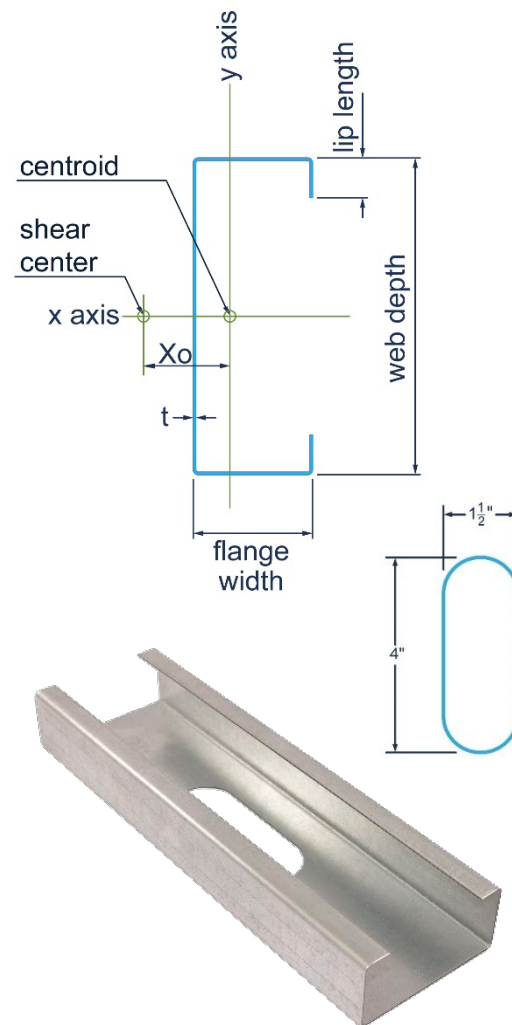

#### Structural Punchout

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Custom stiffened punchouts are available at tighter spacing to reduce thermal transmittance and increase accessibility. Contact Technical Services for additional punchout information.

#### Sustainability

For LEED letters contact Technical Services at [technical@buysuperstud.com](mailto:technical@buysuperstud.com) or visit



© 2025 Super Stud Building Products