



Super Stud Building Products - Product Submittal

Technical Services: technical@buysuperstud.com

800-477-7883
buysuperstud.com

New Jersey
2960 Woodbridge Avenue Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr Hattiesburg, MS 39401
601-584-7550

SUPERMAXX STUD

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

800SMX300-33 (33ksi) Standard Punch

33mils (STR 20ga) Coating: CP60 (G60) Standard or CP90 (G90) Available

Geometric Properties

Web Depth	8 in	Yield Strength, F_y	33 ksi
Flange Width	3 in	Ultimate, F_u	45 ksi
Design Thickness	0.0346 in	Min. Steel Thickness	0.0329 in
First Lip Length	First Lip: 1.125 in Second Lip: 0.5 in		

Gross Section Properties

Cross Sectional Area (A)	0.5813 in ²
Product Weight per Linear Foot	1.9764 lb/ft
Moment of Inertia (I_x)	5.7786 in ⁴
Section Modulus (S_x)	1.4447 in ³
Radius of Gyration (r_x)	3.1529 in
Weak Axis Moment of Inertia (I_y)	0.8398 in ⁴
Weak Axis Radius of Gyration (r_y)	1.2019 in
Depth-to-Thickness Ratio (h/t)	225

NOTE: $h/t > 200$. Bearing stiffeners may be required at supports and concentrated loads.

Effective Section Properties, Strong Axis

Effective Area (A_e)	0.2775 in ²
Moment of Inertia for Deflection (I_{xe})	4.7239 in ⁴
Section Modulus (S_{xe})	1.0198 in ³
Allowable Bending Moment (M_a)	16.8261 in-k
Allowable Shear Force in Web (at Punchout) (V_y)	379 lb

Torsional Properties

St. Venant Torsion Constant ($J \times 1000$)	0.2320 in ⁴
Warping Constant (C_w)	13.6907 in ⁶
Distance from Shear Center to Neutral Axis (X_o)	2.6655 in
Radius of Gyration (r_o)	4.3001 in
Torsional Flexural Constant (Beta)	0.6158

Codes and Standards

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC): 2006 – 2024

Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming

Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M


Galvanized coating: ASTM A653/A653M

Members and tolerances: ASTM C955; AISI S240, AISI S201, AISI S202

Meets ASTM C1007 when installed properly in structure.

3rd party Certification

SuperMAXX Studs have flanges with double returns for superior strength and stiffness that dramatically increase spans and capacities.

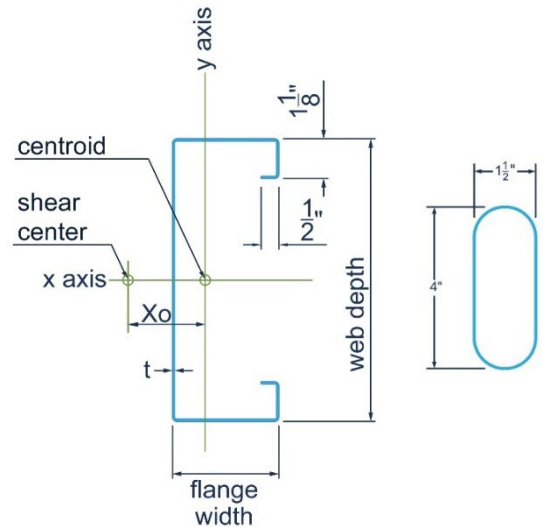


Two hole pattern options Standard Structural Punch

First oval punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Maxx Punch Pattern

Only available in 6" and 8" studs. First oval punchout is centered at 12" from beginning of member. Three reinforced circular holes 6" o.c. follow and pattern repeats. Oval punchouts are at 24" o.c. Center of last punch out is no less than 12" from end of member.

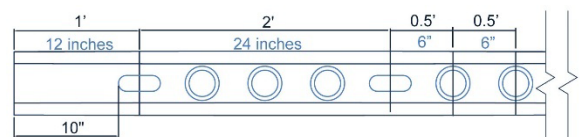

Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit

<https://www.buysuperstud.com/specs-resources/sustainability-and-green-building>



SMX © 2025 Super Stud Building Products