

## 362S200-54 (50ksi) (Standard Punch)


Product Description: 3-5/8" Stud 16GA (2" Flange, 54 mil)

Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	3.625 in.	Yield Strength, Fy	50 ksi
Flange Width	2 in.	Design Thickness	0.0566 in.
Lip Length	0.625 in.	Min. Design Thickness	0.0538 in.

GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	0.479
Weight (lb/ft)	Linear weight per foot	1.63
I <sub>x</sub> (in <sup>4</sup> )	Moment of inertia about the x-axis	1.030
S <sub>x</sub> (in <sup>3</sup> )	Section modulus about the x-axis	0.568
R <sub>x</sub> (in)	Radius of gyration about the x-axis	1.467
I <sub>y</sub> (in <sup>4</sup> )	Moment of inertia about the y-axis	0.277
R <sub>y</sub> (in)	Radius of gyration about the y-axis	0.761
EFFECTIVE PROPERTIES		
I <sub>x</sub> (in <sup>3</sup> )	Effective moment of inertia (x-axis)	1.030
S <sub>x</sub> (in <sup>3</sup> )	Effective section modulus (x-axis)	0.502
M <sub>a</sub> (in-k)	Allowable bending moment-effective section modulus	15.03
M <sub>ad</sub> (in-k)	Allowable bending moment-distortional buckling	14.84
V <sub>g</sub> (lb)	Allowable shear force in web	3372
V <sub>net</sub> (lb)	Allowable strong axis shear at punchout	1016
TORSIONAL PROPERTIES		
J x 1000 (in <sup>4</sup> )	St. Venant torsional constant	0.511
C <sub>w</sub> (in <sup>6</sup> )	Warping constant	0.896
X <sub>o</sub> (in)	Distance from shear center to centroid	-1.715
m (in)	Distance from shear center to mid-plane of web	1.016
R <sub>o</sub> (in)	Polar radius of gyration	2.382
Beta	Torsional Flexural Constant	0.482

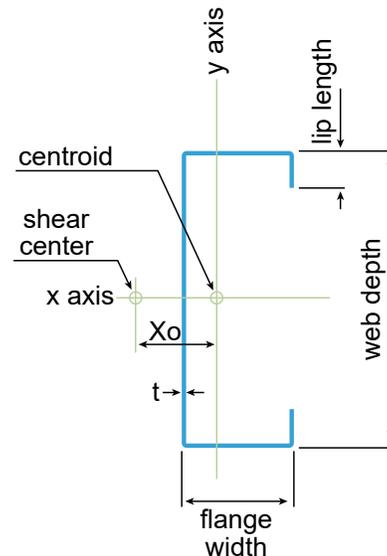

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

### CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20 (effective properties include cold-work strength increase)
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

### Additional Standards:

- AISI S201; AISI S202

### 3rd Party Certification

For LEED Letter requests please submit through: [www.buysuperstud.com](http://www.buysuperstud.com)