



# PRODUCT SUBMITTAL SHEET

For more information or questions, please contact  
the technical department: [technical@buysuperstud.com](mailto:technical@buysuperstud.com)

**Super Stud**

## 1-1/2" Furring Hat Channel (150F125-33)

### STR 20GA (33mil)


Specification Section: 09.22.16 (Non-Structural Metal Framing)

Coating: G40 coating is typically supplied for lighter-gauge products, with G60 coating available for heavier gauges. G90 coating is available upon request for select products and applications.

**SUPER STUD FURRING "HAT" CHANNEL** is a cold-formed, hat-shaped framing component used to create a uniform substrate for the attachment of gypsum panels, siding, and other finish materials. It is commonly used to furr out walls, ceilings, and soffits, particularly over masonry or uneven surfaces where a true plane is required.

Geometric Properties			
Depth	1.500 in.	Design Thickness	0.0346 in.
Width	1.250 in.	Min. Steel Thickness	0.0329 in.


Yield Strength,  $F_y$  33 ksi

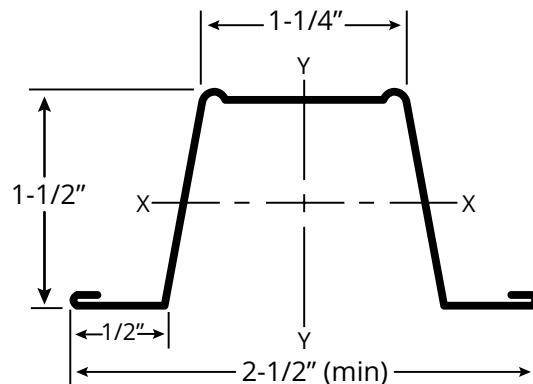

GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	0.174
Weight (lb/ft)	Linear weight per foot of length	0.590
I <sub>x</sub> (in <sup>4</sup> )	Moment of inertia (I <sub>x</sub> )	0.056
R <sub>x</sub> (in)	Radius of gyration (R <sub>x</sub> )	0.566
I <sub>y</sub> (in <sup>4</sup> )	Gross moment of inertia (I <sub>y</sub> )	0.093
R <sub>y</sub> (in)	Gross radius of gyration (R <sub>y</sub> )	0.733

EFFECTIVE PROPERTIES		
I <sub>x</sub> (in <sup>4</sup> )	Moment of inertia for deflection (I <sub>x</sub> )	0.056
S <sub>x</sub> (in <sup>3</sup> )	Section modulus (S <sub>x</sub> )	0.071
M <sub>a</sub> (ft-lb)	Allowable bending moment (M <sub>a</sub> )	117.31
V <sub>a</sub> (lb)	Allowable shear force (V <sub>a</sub> )	474

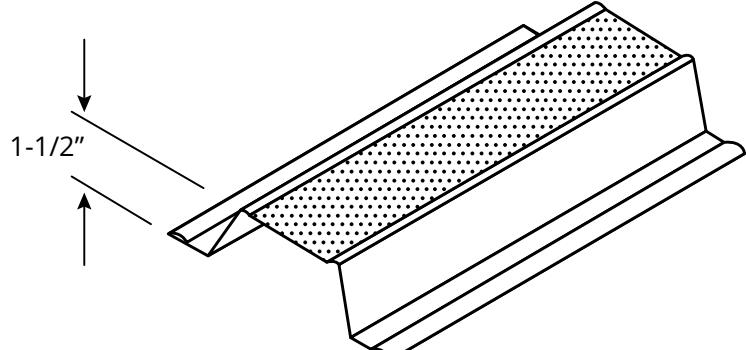

### CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20 (where applicable)
- AISI S240 (where applicable)
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M or equivalent
- Additional Standards: AISI S201; AISI S202

Accessories are manufactured to applicable ASTM and AISI standards based on product type and intended application.

For LEED Letter requests please submit through: [www.buysuperstud.com](http://www.buysuperstud.com)



NEW HAMPSHIRE FACILITY  
12 TALLWOOD DRIVE  
BOW, NH 03304  
P: 603-216-1573

MISSISSIPPI FACILITY  
53 W L RUNNELS IND DR  
HATTIESBURG, MS 39401  
P: 601-584-7550

NEW JERSEY FACILITY  
2960 WOODBRIDGE AVE  
EDISON, NJ 08837  
P: 732-662-6200