


## 7/8" Furring Hat Channel (087F125-30)

### DW 20GA (30mil)

Specification Section: 09.22.16 (Non-Structural Metal Framing)


Coating: G40 coating is typically supplied for lighter-gauge products, with G60 coating available for heavier gauges. G90 coating is available upon request for select products and applications.

SUPER STUD FURRING "HAT" CHANNEL is a cold-formed, hat-shaped framing component used to create a uniform substrate for the attachment of gypsum panels, siding, and other finish materials. It is commonly used to furr out walls, ceilings, and soffits, particularly over masonry or uneven surfaces where a true plane is required.

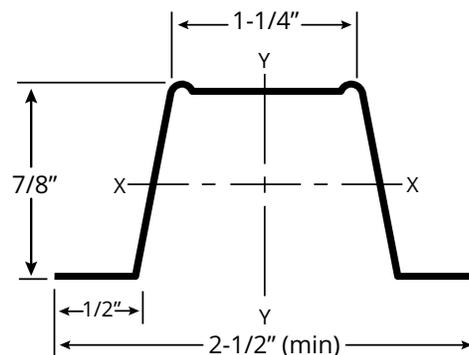

Geometric Properties			
Depth	0.875 in.	Design Thickness	0.0312 in.
Width	1.250 in.	Min. Steel Thickness	0.0296 in.
		Yield Strength, Fy	33 ksi

GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	0.118
Weight (lb/ft)	Linear weight per foot of length	0.401
Ix (in <sup>4</sup> )	Moment of inertia (Ix)	0.014
Rx (in)	Radius of gyration (Rx)	0.350
Iy (in <sup>4</sup> )	Gross moment of inertia (Iy)	0.056
Ry (in)	Gross radius of gyration (Ry)	0.691
EFFECTIVE PROPERTIES		
Ix (in <sup>4</sup> )	Moment of inertia for deflection (Ix)	0.014
Sx (in <sup>3</sup> )	Section modulus (Sx)	0.031
Ma (ft-lb)	Allowable bending moment (Ma)	50.98
Va (lb)	Allowable shear force (Va)	420

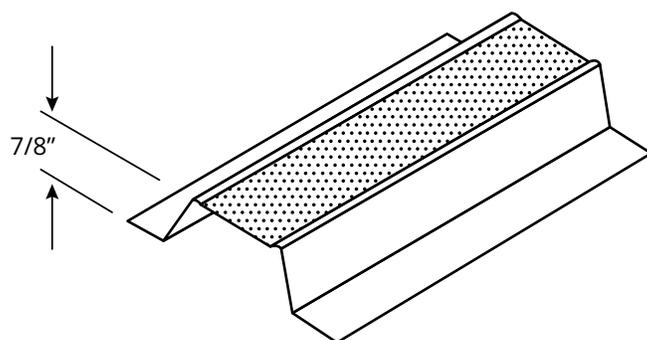

#### CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

#### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

#### Additional Standards:

- AISI S201; AISI S202
- 3rd Party Certification

For LEED Letter requests please submit through:  
[www.buysuperstud.com](http://www.buysuperstud.com) or [www.ebmetal.us](http://www.ebmetal.us)