


7/8" Furring Hat Channel (087F125-33)

STR 20GA (33mil)

Specification Section: 09.22.16 (Non-Structural Metal Framing)


Coating: G40 coating is typically supplied for lighter-gauge products, with G60 coating available for heavier gauges. G90 coating is available upon request for select products and applications.

SUPER STUD FURRING "HAT" CHANNEL is a cold-formed, hat-shaped framing component used to create a uniform substrate for the attachment of gypsum panels, siding, and other finish materials. It is commonly used to furr out walls, ceilings, and soffits, particularly over masonry or uneven surfaces where a true plane is required.

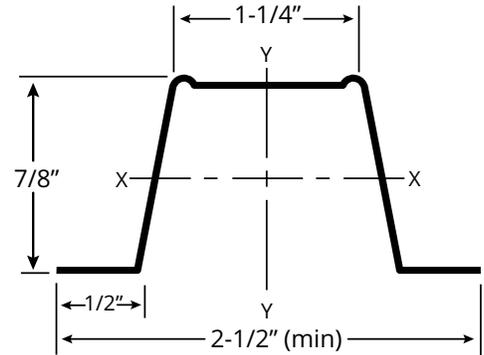

Geometric Properties			
Depth	0.875 in.	Design Thickness	0.0346 in.
Width	1.250 in.	Min. Steel Thickness	0.0329 in.
		Yield Strength, Fy	33 ksi

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.130
Weight (lb/ft)	Linear weight per foot of length	0.443
Ix (in ⁴)	Moment of inertia (Ix)	0.016
Rx (in)	Radius of gyration (Rx)	0.349
Iy (in ⁴)	Gross moment of inertia (Iy)	0.062
Ry (in)	Gross radius of gyration (Ry)	0.689
EFFECTIVE PROPERTIES		
Ix (in ⁴)	Moment of inertia for deflection (Ix)	0.016
Sx (in ³)	Section modulus (Sx)	0.034
Ma (ft-lb)	Allowable bending moment (Ma)	56.23
Va (lb)	Allowable shear force (Va)	464

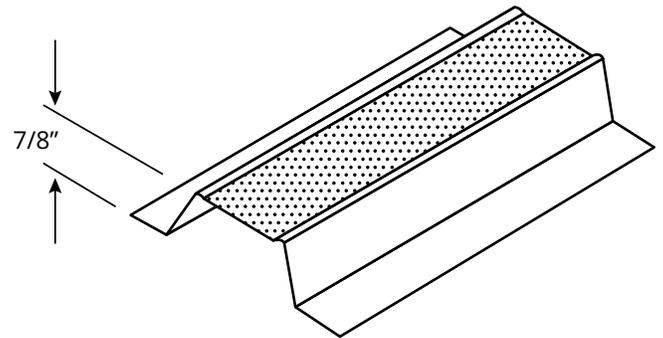

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202
- 3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
 12 TALLWOOD DRIVE
 BOW, NH 03304
 P: 603-216-1573

MISSISSIPPI FACILITY
 53 W L RUNNELS IND DR
 HATTIESBURG, MS 39401
 P: 601-584-7550

NEW JERSEY FACILITY
 2960 WOODBRIDGE AVE
 EDISON, NJ 08837
 P: 732-662-6200