



Super Stud Building Products - Product Submittal

Technical Services: technical@buysuperstud.com

800-477-7883
buysuperstud.com

New Jersey
2960 Woodbridge Avenue
Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr
Hattiesburg, MS 39401
601-584-7550

Specification Section: 09.22.16 (Nonstructural Metal Framing)

Aluminum Breakaway Clips (for Area Separation Walls)

Yield Strength: 21 KSI

Tensile Strength: 22 KSI

Hole Size: 5/32" (4 mm)

Thickness: 0.050" (min) 0.052" (design)

Dimensions: 2.00 in x 2.00 in x 2.50 in

Material: Aluminum 3003-H14

Temperature Range: Heat Softenable at 1000° Fahrenheit

Product Description:

Aluminum breakaway clips are used on both sides of area separation walls, for support by the adjacent structure. Clips are designed so that when a fire occurs, the clips on the fire side of the wall will melt, allowing the burned structure to fall away without dragging down the protective area separation wall. This maintains protection of the adjacent building, no matter which side of the wall is exposed to fire.

Super Stud clips are the most common configuration for Area Separation Wall assemblies. Clips are made of construction grade aluminum sheet, with pre-drilled holes in both flanges. Holes are 5/32" diameter (0.156" or 4 mm) and placed as shown in diagrams.

Codes and Standards:

Super Stud Aluminum Breakaway Clips comply with the applicable provisions of the following:



International Building Code (IBC) 2006 - 2024

Sheet Aluminum: Aluminum Association (AA) 3003-H14

UNS A93003, ISO AlMn1Cu

Members and Tolerances: ASTM C645

Meets ASTM C1007 when installed properly in structure

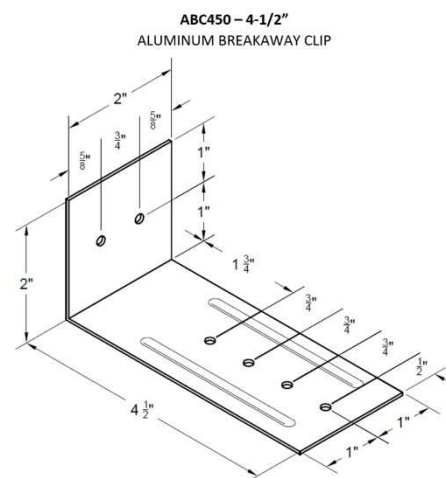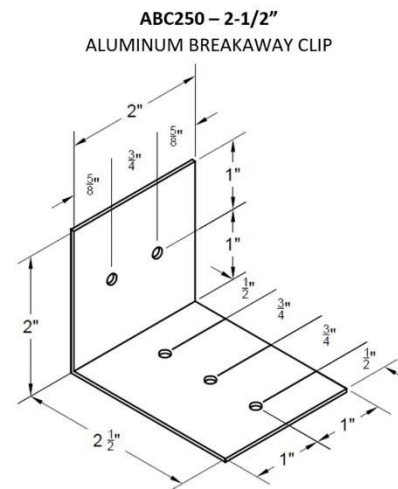

Clip Type	Designation	Design Thickness (Mils)	Dimensions	Design Shear Strengths
Aluminum Breakaway Clip	ABC250	0.052"	2"x2"x2 1/2"	640 lbs
	ABC450	0.052"	2"x2"x4 1/2"	780 lbs

Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit

<https://www.buysuperstud.com/specs-resources/sustainability-and-green-building>

Clip © 01/25 Super Stud Building Products



Super Stud Building Products - Product Submittal

Technical Services: technical@buysuperstud.com

800-477-7883
buysuperstud.com

New Jersey
2960 Woodbridge Avenue
Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr
Hattiesburg, MS 39401
601-584-7550


UL Designs U336, U347, U366, U373, U375, U388, V411 W453 and W454 Gypsum Association 3-hour design ASW 2600

Use and Installation Instructions:



Important: For a detailed description of clip requirements and wall construction, please consult the appropriate Underwriters Laboratories (UL) design or gypsum company requirements for Area Separation Walls.

Installation:


- Once the first level of wall is installed with double liner panels, H-studs, and C-runners, attach all H-studs and vertical C-runners to adjacent framing with aluminum breakaway clips.
- Clips attaching H-studs and vertical C-runners to adjacent framing on both sides require attachment to the H-stud and C-runner with one 3/8" Type S screw.
- Clips attaching H-studs and vertical C-runners to adjacent framing on only one side and with exterior exposure on the other side require attachment to the H-stud and C-runner with two 3/8" Type S screws.
- Attachment to the adjacent framing is with one 1-1/4" Type W or Type S screw.
- Wall heights are dictated by the specific fire-rated assembly.
- At least one clip is required at each floor line at each vertical steel element of the area separation wall.

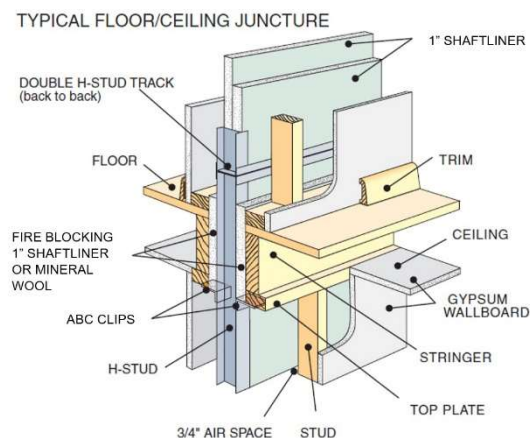

Super Stud ABC250



Super Stud H-Stud



Super Stud C-Runner



CFSEI
COLD-FORMED STEEL
ENGINEERS INSTITUTE



Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit <https://www.buysuperstud.com/specs-resources/sustainability-and-green-building>