


Product category: Corner Bead

A positive attachment can be achieved with nails or screws.

High Quality Super Bead is used in conventional gypsum wallboard installations.

All of our corner beads provide a straight, smooth finished surface for outside corners of gypsum wallboard assemblies while it protects the corner from abuse and wear after installations.

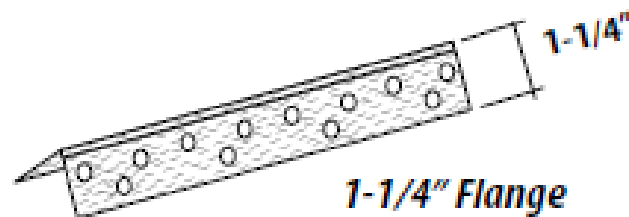

Super Bead

Dimensions:

31 Gauge: 14 mils, 0.0135 inch minimum thickness

1 1/4" flange

Please specify dimensions when ordering. Lengths of 8', 10' and 12' are available

Packaging:

8' length	63 pcs/carton	48 carton/skid
10' length	50 pcs/carton	48 carton/skid
12' length	42 pcs/carton	48 carton/skid

Codes & Standards:

- Meets ASTM C1047 requirements for coating, properties, and manufacture.
- Steel coating meets requirements of one of the following:
 - o ASTM A653, G-30 minimum
 - o ASTM A463, Ti-40 minimum.

LEED and MSDS information available upon request; call (732) 662-6217.