

7/8" Furring Hat Channel (087F125-54)

16GA (54mil)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

Coating:


- 18mil - 30mil: G40 (standard), G60 (special order)
- 33mil - 97mil: G60 (standard), G90 (special order)

SUPER STUD FURRING "HAT" CHANNEL is a cold-formed, hat-shaped framing component used to create a uniform substrate for the attachment of gypsum panels, siding, and other finish materials. It is commonly used to furr out walls, ceilings, and soffits, particularly over masonry or uneven surfaces where a true plane is required.

Geometric Properties			
Depth	0.875 in.	Design Thickness	0.0566 in.
Width	1.250 in.	Min. Steel Thickness	0.0538 in.
		Yield Strength, Fy	50 ksi

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.207
Weight (lb/ft)	Linear weight per foot of length	0.706
Ix (in ⁴)	Moment of inertia (Ix)	0.024
Rx (in)	Radius of gyration (Rx)	0.340
Iy (in ⁴)	Gross moment of inertia (Iy)	0.095
Ry (in)	Gross radius of gyration (Ry)	0.678

EFFECTIVE PROPERTIES		
Ix (in ⁴)	Moment of inertia for deflection (Ix)	0.024
Sx (in ³)	Section modulus (Sx)	0.059
Ma (ft-lb)	Allowable bending moment (Ma)	128.85
Va (lb)	Allowable shear force (Va)	1091

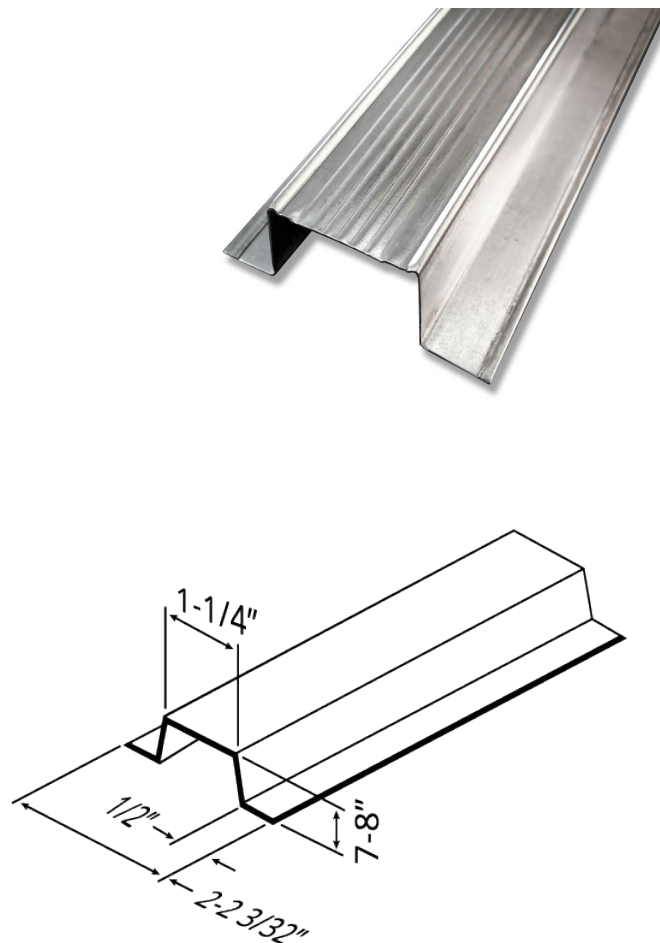

CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20 (where applicable)
- AISI S240 (where applicable)
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M or equivalent
- Additional Standards: AISI S201; AISI S202

Accessories are manufactured to applicable ASTM and AISI standards based on product type and intended application.

For LEED Letter requests please submit through: www.buysuperstud.com

NEW HAMPSHIRE FACILITY
12 TALLWOOD DRIVE
BOW, NH 03304
P: 603-216-1573

MISSISSIPPI FACILITY
53 W L RUNNELS IND DR
HATTIESBURG, MS 39401
P: 601-584-7550

NEW JERSEY FACILITY
2960 WOODBRIDGE AVE
EDISON, NJ 08837
P: 732-662-6200