



Super Stud Building Products - Product Submittal

Technical Services: technical@buysuperstud.com

800-477-7883
buysuperstud.com

New Jersey
2960 Woodbridge Avenue
Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr
Hattiesburg, MS 39401
601-584-7550

Specification Section: 09.22.16 Non-Structural Metal Framing 250EDS125-18 (55ksi) Standard Punch

The Edge™ Performance Nonstructural Drywall Studs
19mil Coating: G40 (standard), G60 or G90 (special order)

Geometric Properties

Web Depth	2.5 in	Yield Strength, F_y	55 ksi
Flange Width	1.25 in	Design Thickness	0.0188 in
Lip Length	0.350 in	Min. Steel Thickness	0.0179 in

Gross Section Properties

Cross Sectional Area (A)	0.1020 in ²
Product Weight per Linear Foot	0.347 lb/ft
Moment of Inertia (I_x)	0.1070 in ⁴
Section Modulus (S_x)	0.0856 in ³
Radius of Gyration (r_x)	1.024 in
Weak Axis Moment of Inertia (I_y)	0.0203 in ⁴
Weak Axis Radius of Gyration (r_y)	0.4465 in
Depth-to-Thickness Ratio (h/t)	128

Effective Section Properties, Strong Axis

Effective Area (A_e)	0.0568 in ²
Moment of Inertia for Deflection (I_{xe})	0.0870 in ⁴
Section Modulus (S_{xe})	0.0616 in ³
Allowable Bending Moment (M_a)	1.6946 in-k
Allowable Shear Force in Web (at Punchout) (V_y)	244 lb

Torsional Properties



St. Venant Torsion Constant ($J \times 1000$)	0.0120 in ⁴
Warping Constant (C_w)	0.0246 in ⁶
Distance from Shear Center to Neutral Axis (X_o)	0.9123 in
Radius of Gyration (r_o)	1.4424 in
Torsional Flexural Constant (Beta)	0.6000

Codes and Standards

Super Stud products comply with the applicable provisions of the following:
International Building Code (IBC): 2006 – 2024
Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming
Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
Galvanized coating: ASTM A653/A653M or equivalent
UL Designs: U419, V438, V489, V498, W433, W440
Tested in accordance with ASTM E119; ANSI/UL 263
Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
Meets ASTM C754 when installed properly in structure.
3rd party Certification

Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit
<https://www.buysuperstud.com/specs-resources/sustainability-and-green-building>

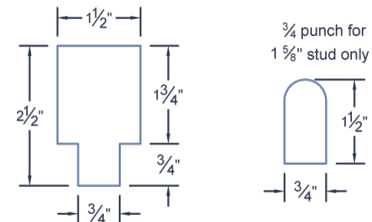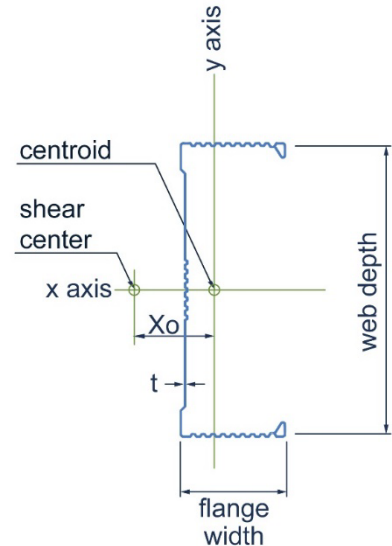

Non-Structural Punchout

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

