

PROJECT SUBMITTAL SHEET

FOR MORE INFORMATION OR QUESTIONS,
PLEASE CONTACT THE TECHNICAL DEPARTMENT:
SUPER STUD: TECHNICAL@BUYSUPERSTUD.COM



600S125-15 (Standard Punch)

Product Line: 600EDS125-15 - The Edge™ 25

Coating: G40 (standard), G60 (special order)




Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	6 in.	Yield Strength, Fy	50 ksi
Flange Width	1.25 in.	Design Thickness	0.0150 in.
Lip Length	.350 in.	Min. Design Thickness	0.0149 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.1332
Weight (lb/ft)	Linear weight per foot	0.453
I _x (in ⁴)	Moment of inertia about the x-axis	0.6523
S _x (in ³)	Section modulus about the x-axis	0.2174
R _x (in)	Radius of gyration about the x-axis	2.213
I _y (in ⁴)	Moment of inertia about the y-axis	0.0198
R _y (in)	Radius of gyration about the y-axis	0.3860
h/t	Depth-to-thickness ratio	394

EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0448
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.4768
S _{xe} (in ³)	Effective section modulus (x-axis)	0.1278
Ma (in-k)	Allowable moment capacity	3.1960
V _y (lb)	Allowable shear force in web	46

TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0100
C _w (in ⁶)	Warping constant	0.1389
X _o (in)	Distance from shear center to centroid	0.6124
R _o (in)	Polar radius of gyration	2.3285
Beta	Torsional Flexural Constant	0.9308

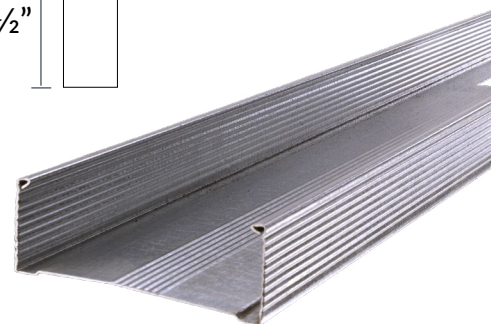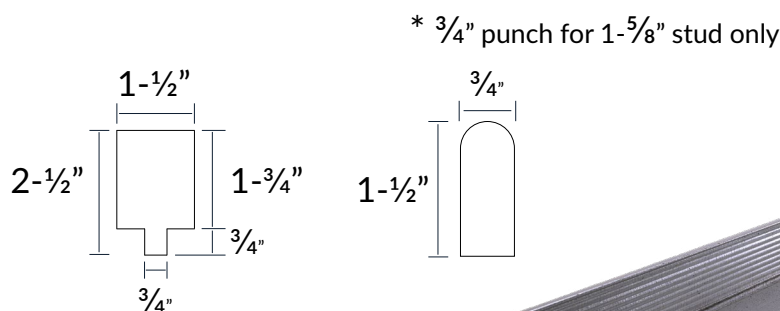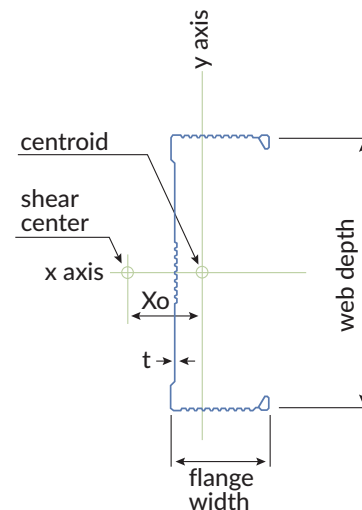

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006 – 2024
- Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U419, V438, V489, V498, W433, W440
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure

For LEED Letter requests please submit through: ebmetal.us. or buysuperstud.com

NEW HAMPSHIRE FACILITY
12 TALLWOOD DRIVE
BOW, NH 03304
P: 601-584-7550

MISSISSIPPI FACILITY
53 W L RUNNELS IND DR
HATTIESBURG, MS 39401
P: 601-584-7550

NEW JERSEY FACILITY
2960 WOODBRIDGE AVE
EDISON, NJ 08837
P: 732-662-6200