



PRODUCT SUBMITTAL SHEET

For more information or questions, please contact:
technical@buysuperstud.com | info@ebmetal.us



600S125-21 (Standard Punch)

Product Line: 600NS125-21 NitroStud 21 mil (20EQ ga.)

Coating: G40 (standard), G60 (special order)



Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	6 in.	Yield Strength, Fy	50 ksi
Flange Width	1.25 in.	Design Thickness	0.0220 in.
Lip Length	.250 in.	Min. Steel Thickness	0.0209 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.195
Weight (lb/ft)	Linear weight per foot	0.66
I _x (in ⁴)	Moment of inertia about the x-axis	0.9464
S _x (in ³)	Section modulus about the x-axis	0.3167
R _x (in)	Radius of gyration about the x-axis	2.2021
I _y (in ⁴)	Moment of inertia about the y-axis	0.0273
R _y (in)	Radius of gyration about the y-axis	0.3738

EFFECTIVE PROPERTIES		
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.7074
S _{xe} (in ³)	Effective section modulus (x-axis)	0.1926
M _a (in-k)	Allowable moment capacity	4.815
M _{ad} (in-k)	Design moment capacity	4.272
V _{ag} (lb)	Allowable shear force in web	257
V _{anet} (lb)	Net allowable shear	257

TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0315
C _w (in ⁶)	Warping constant	0.1966
X _o (in)	Distance from shear center to centroid	-0.5776
m (in)	Torsional radius of gyration	0.3005
R _o (in)	Polar radius of gyration	2.3071
Beta	Torsional Flexural Constant	0.9373

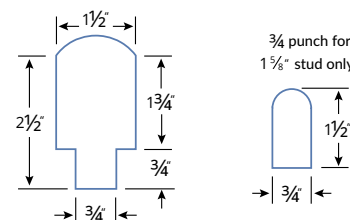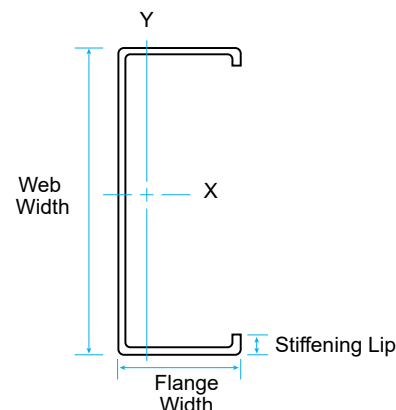

Non-structural punchout first punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006 – 2024
- AISI S100-16 (2020) w/S2-20 and AISI S220-20
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U411, U412, U419, U420, U425, U435, U451, U465, UL 263, CIKV.R38201, CIKV7.R38201
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
12 TALLWOOD DRIVE
BOW, NH 03304
P: 603-216-1573

MISSISSIPPI FACILITY
53 W L RUNNELS IND DR
HATTIESBURG, MS 39401
P: 601-584-7550

NEW JERSEY FACILITY
2960 WOODBRIDGE AVE
EDISON, NJ 08837
P: 732-662-6200

This product submittal sheet reflects the most current information available and supersedes any and all previous digital or printed publications effective February 2026.