

## 162S125-18 (Standard Punch)

Product Line: 162EDS125-18- The Edge™ Performance 20 (18 mil)

Coating: G40 (standard), G60 (special order)



Specification Section: 09.22.16 (Non-Structural Metal Framing)

| GEOMETRIC PROPERTIES |           |                      |            |
|----------------------|-----------|----------------------|------------|
| Web Depth            | 1.625 in. | Yield Strength, Fy   | 55 ksi     |
| Flange Width         | 1.25 in.  | Design Thickness     | 0.0188 in. |
| Lip Length           | .350 in.  | Min. Steel Thickness | 0.0179 in. |

| GROSS PROPERTIES                  |                                     |        |
|-----------------------------------|-------------------------------------|--------|
| Area (in <sup>2</sup> )           | Total cross-sectional steel area    | 0.0856 |
| Weight (lb/ft)                    | Linear weight per foot              | 0.291  |
| I <sub>x</sub> (in <sup>4</sup> ) | Moment of inertia about the x-axis  | 0.0409 |
| S <sub>x</sub> (in <sup>3</sup> ) | Section modulus about the x-axis    | 0.0503 |
| R <sub>x</sub> (in)               | Radius of gyration about the x-axis | 0.691  |
| I <sub>y</sub> (in <sup>4</sup> ) | Moment of inertia about the y-axis  | 0.0178 |
| R <sub>y</sub> (in)               | Radius of gyration about the y-axis | 0.4558 |

| EFFECTIVE PROPERTIES               |                                      |        |
|------------------------------------|--------------------------------------|--------|
| Area (in <sup>2</sup> )            | Effective area                       | 0.0527 |
| I <sub>xe</sub> (in <sup>3</sup> ) | Effective moment of inertia (x-axis) | 0.0337 |
| S <sub>xe</sub> (in <sup>3</sup> ) | Effective section modulus (x-axis)   | 0.0365 |
| Ma (in-k)                          | Allowable moment capacity            | 1.0033 |
| V <sub>y</sub> (lb)                | Allowable shear force in web         | 214    |

| TORSIONAL PROPERTIES              |                                        |        |
|-----------------------------------|----------------------------------------|--------|
| J x 1000 (in <sup>4</sup> )       | St. Venant torsional constant          | 0.0101 |
| C <sub>w</sub> (in <sup>6</sup> ) | Warping constant                       | 0.0097 |
| X <sub>o</sub> (in)               | Distance from shear center to centroid | 1.0465 |
| R <sub>o</sub> (in)               | Polar radius of gyration               | 1.3343 |
| Beta                              | Torsional Flexural Constant            | 0.3849 |

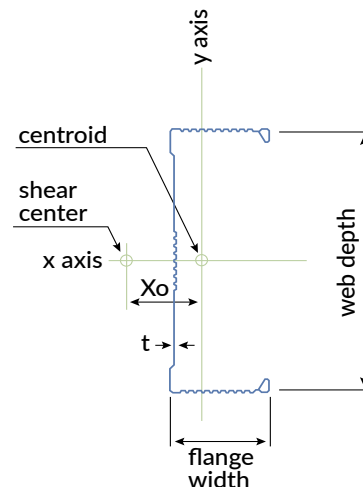

Non-structural punchout first punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.



### CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

### Additional Standards:

- AISI S201; AISI S202
- 3rd Party Certification

For LEED Letter requests please submit through:  
[www.buysuperstud.com](http://www.buysuperstud.com) or [www.ebmetal.us](http://www.ebmetal.us)

NEW HAMPSHIRE FACILITY  
 12 TALLWOOD DRIVE  
 BOW, NH 03304  
 P: 603-216-1573

MISSISSIPPI FACILITY  
 53 W L RUNNELS IND DR  
 HATTIESBURG, MS 39401  
 P: 601-584-7550

NEW JERSEY FACILITY  
 2960 WOODBRIDGE AVE  
 EDISON, NJ 08837  
 P: 732-662-6200