

250T125-33 Track


Product Description: 2-1/2" Track STR 20GA (1-1/4" Leg, 33mil)

Coating: G60 (standard), G90 (special order)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	2.5 in.	Yield Strength, F_y	33 ksi
Flange Width	1.25 in.	Design Thickness	0.0346 in.
		Min. Steel Thickness	0.0329 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.173
Weight (lb/ft)	Linear weight per foot	0.59
I_x (in ⁴)	Moment of inertia about the x-axis	0.192
S_x (in ³)	Section modulus about the x-axis	0.145
R_x (in)	Radius of gyration about the x-axis	1.054
I_y (in ⁴)	Moment of inertia about the y-axis	0.027
R_y (in)	Radius of gyration about the y-axis	0.397
EFFECTIVE PROPERTIES		
I_x (in ³)	Effective moment of inertia (x-axis)	0.166
S_x (in ³)	Effective section modulus (x-axis)	0.103
M_a (in-k)	Allowable bending moment-effective section modulus	2.04
V_a (lb)	Allowable shear force in web	1024
TORSIONAL PROPERTIES		
$J \times 1000$ (in ⁴)	St. Venant torsional constant	0.0690
C_w (in ⁶)	Warping constant	0.033
X_o (in)	Distance from shear center to centroid	-0.760
m (in)	Distance from shear center to mid-plane of web	0.456
R_o (in)	Polar radius of gyration	1.358
Beta	Torsional Flexural Constant	0.687

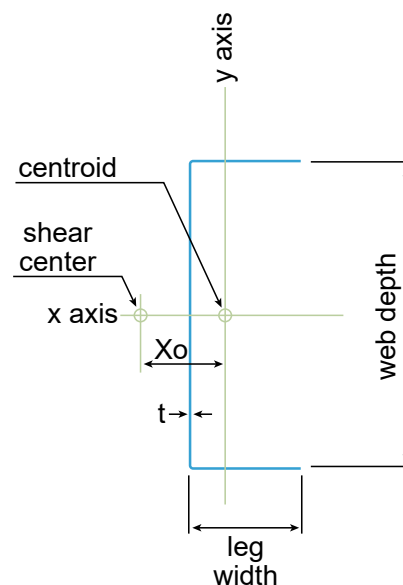

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202

3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
 12 TALLWOOD DRIVE
 BOW, NH 03304
 P: 603-216-1573

MISSISSIPPI FACILITY
 53 W L RUNNELS IND DR
 HATTIESBURG, MS 39401
 P: 601-584-7550

NEW JERSEY FACILITY
 2960 WOODBRIDGE AVE
 EDISON, NJ 08837
 P: 732-662-6200