

162T200-15 Track

Product Line: 162EDT200-15- The Edge™ 25 (15 mil)

Coating: G40 (standard), G60 (special order)


Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	1.625 in.	Yield Strength, Fy	50 ksi
Leg Width	2 in.	Design Thickness	0.0153 in.
		Min. Steel Thickness	0.0145 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.0870
Weight (lb/ft)	Linear weight per foot	0.296
I _x (in ⁴)	Moment of inertia about the x-axis	0.0519
S _x (in ³)	Section modulus about the x-axis	0.0595
R _x (in)	Radius of gyration about the x-axis	0.773
I _y (in ⁴)	Moment of inertia about the y-axis	0.0382
R _y (in)	Radius of gyration about the y-axis	0.6632

EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0204
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.0211
S _{xe} (in ³)	Effective section modulus (x-axis)	0.0160
M _a (in-k)	Allowable moment capacity	0.3200
V _y (lb)	Allowable shear force in web	193

TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0068
C _w (in ⁶)	Warping constant	0.0206
X _o (in)	Distance from shear center to centroid	1.5745
R _o (in)	Polar radius of gyration	1.8751
Beta	Torsional Flexural Constant	0.2949

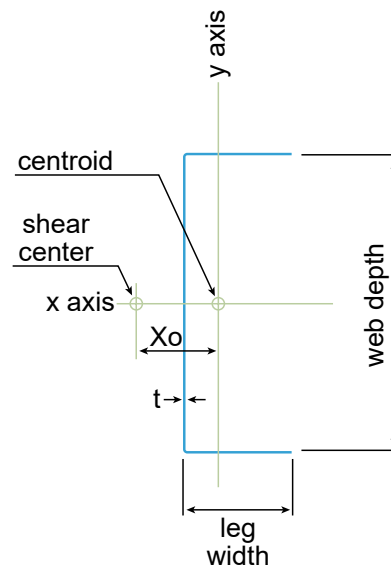

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202

3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
 12 TALLWOOD DRIVE
 BOW, NH 03304
 P: 603-216-1573

MISSISSIPPI FACILITY
 53 W L RUNNELS IND DR
 HATTIESBURG, MS 39401
 P: 601-584-7550

NEW JERSEY FACILITY
 2960 WOODBRIDGE AVE
 EDISON, NJ 08837
 P: 732-662-6200