

162T200-18 Track


Product Line: 162EDT200-18- The Edge™ Performance 20 (18 mil)

Coating: G40 (standard), G60 (special order)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	1.625 in.	Yield Strength, Fy	55 ksi
Leg Width	2 in.	Design Thickness	0.0188 in.
		Min. Steel Thickness	0.0179 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.1066
Weight (lb/ft)	Linear weight per foot	0.362
I _x (in ⁴)	Moment of inertia about the x-axis	0.0632
S _x (in ³)	Section modulus about the x-axis	0.0725
R _x (in)	Radius of gyration about the x-axis	0.770
I _y (in ⁴)	Moment of inertia about the y-axis	0.0468
R _y (in)	Radius of gyration about the y-axis	0.6626
EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0298
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.0294
S _{xe} (in ³)	Effective section modulus (x-axis)	0.0235
Ma (in-k)	Allowable moment capacity	0.4700
V _y (lb)	Allowable shear force in web	333
TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0126
C _w (in ⁶)	Warping constant	0.0249
X _o (in)	Distance from shear center to centroid	1.5746
R _o (in)	Polar radius of gyration	1.8738
Beta	Torsional Flexural Constant	0.2939

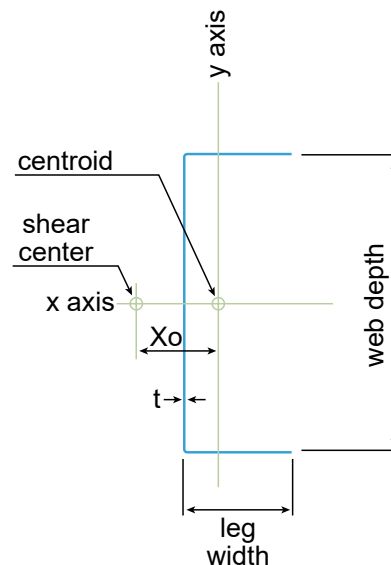

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202

3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
 12 TALLWOOD DRIVE
 BOW, NH 03304
 P: 603-216-1573

MISSISSIPPI FACILITY
 53 W L RUNNELS IND DR
 HATTIESBURG, MS 39401
 P: 601-584-7550

NEW JERSEY FACILITY
 2960 WOODBRIDGE AVE
 EDISON, NJ 08837
 P: 732-662-6200