

1200S162-43 (Standard Punch)

Product Description: 12" Stud 18GA (1-5/8" Flange, 43 mil)


Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	12 in.	Yield Strength, F_y	33 ksi
Flange Width	1.625 in.	Design Thickness	0.0451 in.
Lip Length	0.500 in.	Min. Steel Thickness	0.0428 in.

**This section does not meet the requirements of the AISI North American Specification. Increase member thickness or contact Super Stud Technical Services for design assistance and alternative solutions.*

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.714
Weight (lb/ft)	Linear weight per foot	2.43
I_x (in ⁴)	Moment of inertia about the x-axis	12.53
S_x (in ³)	Section modulus about the x-axis	2.09
R_x (in)	Radius of gyration about the x-axis	4.19
I_y (in ⁴)	Moment of inertia about the y-axis	0.17
R_y (in)	Radius of gyration about the y-axis	0.49
EFFECTIVE PROPERTIES		
I_x (in ³)	Effective moment of inertia (x-axis)	8.43
S_x (in ³)	Effective section modulus (x-axis)	1.07
M_a (in-k)	Allowable bending moment-effective section modulus	21.1
M_{ad} (in-k)	Allowable bending moment-distortional buckling	25.1
V_{a_g} (lb)	Allowable shear force in web	315
$V_{a_{net}}$ (lb)	Allowable strong axis shear at punchout	315
TORSIONAL PROPERTIES		
$J \times 1000$ (in ⁴)	St. Venant torsional constant	0.484
C_w (in ⁶)	Warping constant	5.18
X_o (in)	Distance from shear center to centroid	-0.74
m (in)	Distance from shear center to mid-plane of web	0.50
R_o (in)	Polar radius of gyration	4.28
Beta	Torsional Flexural Constant	0.97

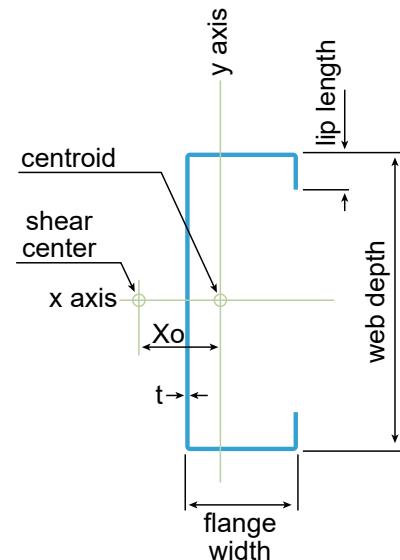

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202
- 3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
12 TALLWOOD DRIVE
BOW, NH 03304
P: 603-216-1573

MISSISSIPPI FACILITY
53 W L RUNNELS IND DR
HATTIESBURG, MS 39401
P: 601-584-7550

NEW JERSEY FACILITY
2960 WOODBRIDGE AVE
EDISON, NJ 08837
P: 732-662-6200