

350T200-33 Track


Product Description: 3-1/2" Track STR 20GA (2" Leg, 33mil)

Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	3.5 in.	Yield Strength, Fy	33 ksi
Leg Width	2 in.	Design Thickness	0.0346 in.
		Min. Steel Thickness	0.0329 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.259
Weight (lb/ft)	Linear weight per foot	0.88
I _x (in ⁴)	Moment of inertia about the x-axis	0.574
S _x (in ³)	Section modulus about the x-axis	0.315
R _x (in)	Radius of gyration about the x-axis	1.488
I _y (in ⁴)	Moment of inertia about the y-axis	0.108
R _y (in)	Radius of gyration about the y-axis	0.646
EFFECTIVE PROPERTIES		
I _x (in ³)	Effective moment of inertia (x-axis)	0.429
S _x (in ³)	Effective section modulus (x-axis)	0.181
M _a (in-k)	Allowable bending moment-effective section modulus	3.58
V _a (lb)	Allowable shear force in web	1024
TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.1035
C _w (in ⁶)	Warping constant	0.249
X _o (in)	Distance from shear center to centroid	-1.285
m (in)	Distance from shear center to mid-plane of web	0.761
R _o (in)	Polar radius of gyration	2.069
Beta	Torsional Flexural Constant	0.614

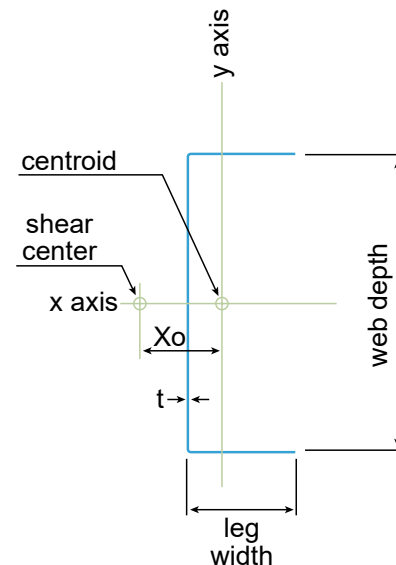

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202

3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us