

## 400T200-54 (50ksi) Track


Product Description: 4" Track 16GA (2" Leg, 54mil)

Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

| GEOMETRIC PROPERTIES |       |                       |            |
|----------------------|-------|-----------------------|------------|
| Web Depth            | 4 in. | Yield Strength, $F_y$ | 50 ksi     |
| Leg Width            | 2 in. | Design Thickness      | 0.0566 in. |
|                      |       | Min. Steel Thickness  | 0.0538 in. |

| GROSS PROPERTIES                   |                                                    |        |
|------------------------------------|----------------------------------------------------|--------|
| Area (in <sup>2</sup> )            | Total cross-sectional steel area                   | 0.452  |
| Weight (lb/ft)                     | Linear weight per foot                             | 1.54   |
| $I_x$ (in <sup>4</sup> )           | Moment of inertia about the x-axis                 | 1.268  |
| $S_x$ (in <sup>3</sup> )           | Section modulus about the x-axis                   | 0.604  |
| $R_x$ (in)                         | Radius of gyration about the x-axis                | 1.675  |
| $I_y$ (in <sup>4</sup> )           | Moment of inertia about the y-axis                 | 0.182  |
| $R_y$ (in)                         | Radius of gyration about the y-axis                | 0.635  |
| EFFECTIVE PROPERTIES               |                                                    |        |
| $I_x$ (in <sup>3</sup> )           | Effective moment of inertia (x-axis)               | 1.038  |
| $S_x$ (in <sup>3</sup> )           | Effective section modulus (x-axis)                 | 0.398  |
| $M_a$ (in-k)                       | Allowable bending moment-effective section modulus | 11.90  |
| $V_a$ (lb)                         | Allowable shear force in web                       | 3372   |
| TORSIONAL PROPERTIES               |                                                    |        |
| $J \times 1000$ (in <sup>4</sup> ) | St. Venant torsional constant                      | 0.4828 |
| $C_w$ (in <sup>6</sup> )           | Warping constant                                   | 0.551  |
| $X_o$ (in)                         | Distance from shear center to centroid             | -1.217 |
| $m$ (in)                           | Distance from shear center to mid-plane of web     | 0.730  |
| $R_o$ (in)                         | Polar radius of gyration                           | 2.166  |
| Beta                               | Torsional Flexural Constant                        | 0.684  |

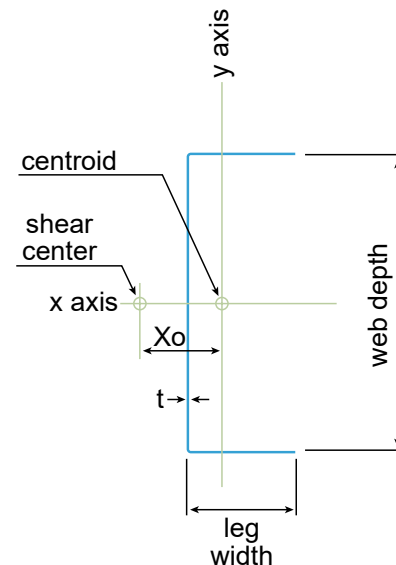

### CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

### Additional Standards:

- AISI S201; AISI S202

### 3rd Party Certification

For LEED Letter requests please submit through:  
[www.buysuperstud.com](http://www.buysuperstud.com) or [www.ebmetal.us](http://www.ebmetal.us)