

## 800SJ350-68

Product Description: 8" Super Joist 14GA (3-1/2" Flange, 68mil)

Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

Single  
Return Flange




GEOMETRIC PROPERTIES			
Web Depth	8 in.	Yield Strength, Fy	50 ksi
Flange Width	3.50 in.	Design Thickness	0.0713 in.
Lip Length	1.00 in.	Min. Steel Thickness	0.0677 in.


GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	1.1743
Weight (lb/ft)	Linear weight per foot	3.9926
I <sub>x</sub> (in <sup>4</sup> )	Moment of inertia about the x-axis	12.0474
S <sub>x</sub> (in <sup>3</sup> )	Section modulus about the x-axis	3.0119
R <sub>x</sub> (in)	Radius of gyration about the x-axis	3.2030
I <sub>y</sub> (in <sup>4</sup> )	Moment of inertia about the y-axis	2.0346
R <sub>y</sub> (in)	Radius of gyration about the y-axis	1.3163

EFFECTIVE PROPERTIES		
Max (in-k)	Maximum allowable bending moment	56.8577
I <sub>xe</sub> (in <sup>4</sup> )	Effective moment of inertia (x-axis)	10.1813
S <sub>xe</sub> (in <sup>3</sup> )	Effective section modulus (x-axis)	2.2743
V <sub>a</sub> (k)	Maximum allowable shear force about the y-axis	1487.7

TORSIONAL PROPERTIES		
J x 1000 (in <sup>4</sup> )	St. Venant torsional constant	1.990
C <sub>w</sub> (in <sup>6</sup> )	Warping constant	27.443
X <sub>o</sub> (in)	Distance from shear center to centroid	2.745
R <sub>o</sub> (in)	Polar radius of gyration	4.419
Beta	Torsional Flexural Constant	0.614

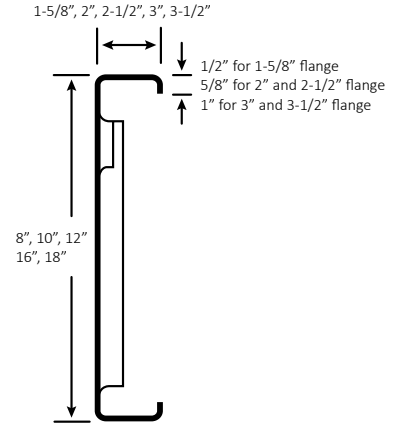

TYPICAL JOIST MEMBER SIZING				
A	B	C	D	E
Section Web Depth (in)	Large Hole Diameter (in)	Large Hole Spacing (in o.c.)	Small Hole Diameter (in)	Minimum Distance from End to Center of First Large Hole (in)
8	4.25	9	1	22

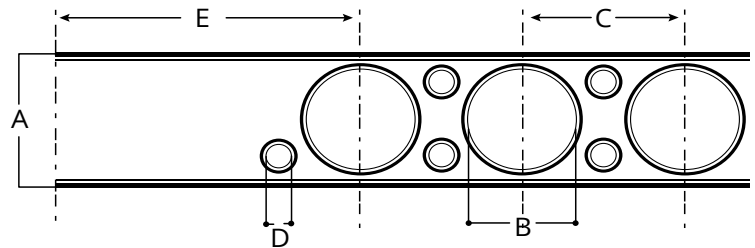

### CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

### Additional Standards:

- AISI S201; AISI S202

### 3rd Party Certification

For LEED Letter requests please submit through:  
[www.buysuperstud.com](http://www.buysuperstud.com) or [www.ebmetal.us](http://www.ebmetal.us)