

## 400T125-15 Track


Product Line: 400EDT125-15- The Edge™ 25 (15 mil)

Coating: G40 (standard), G60 (special order)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	4 in.	Yield Strength, Fy	50 ksi
Leg Width	1.25 in.	Design Thickness	0.0153 in.
		Min. Steel Thickness	0.0145 in.

GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	0.1003
Weight (lb/ft)	Linear weight per foot	0.341
I <sub>x</sub> (in <sup>4</sup> )	Moment of inertia about the x-axis	0.2458
S <sub>x</sub> (in <sup>3</sup> )	Section modulus about the x-axis	0.1194
R <sub>x</sub> (in)	Radius of gyration about the x-axis	1.566
I <sub>y</sub> (in <sup>4</sup> )	Moment of inertia about the y-axis	0.0140
R <sub>y</sub> (in)	Radius of gyration about the y-axis	0.3736
EFFECTIVE PROPERTIES		
Area (in <sup>2</sup> )	Effective area	0.0210
I <sub>xe</sub> (in <sup>3</sup> )	Effective moment of inertia (x-axis)	0.1181
S <sub>xe</sub> (in <sup>3</sup> )	Effective section modulus (x-axis)	0.0402
Ma (in-k)	Allowable moment capacity	0.8045
V <sub>y</sub> (lb)	Allowable shear force in web	63
TORSIONAL PROPERTIES		
J x 1000 (in <sup>4</sup> )	St. Venant torsional constant	0.0078
C <sub>w</sub> (in <sup>6</sup> )	Warping constant	0.0421
X <sub>o</sub> (in)	Distance from shear center to centroid	0.6396
R <sub>o</sub> (in)	Polar radius of gyration	1.7321
Beta	Torsional Flexural Constant	0.8636

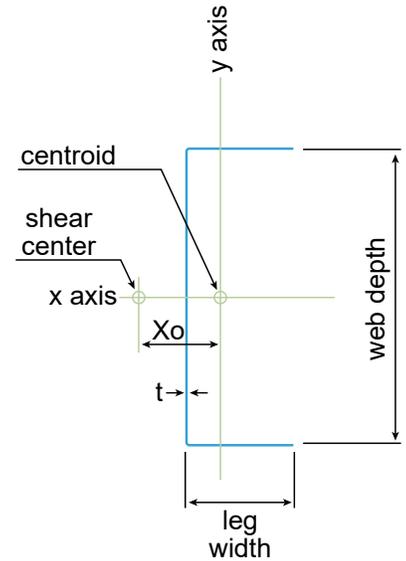

### CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- Complies with AISI S100-16 (2020) w/S2-20. *Effective properties incorporate the strength increase from the cold work of forming*
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U419, V438, V489, V498, W433, W440
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure.
- 3rd party Certification

For LEED Letter requests please submit through:  
[www.buysuperstud.com](http://www.buysuperstud.com) or [www.ebmetal.us](http://www.ebmetal.us)

NEW HAMPSHIRE FACILITY  
 12 TALLWOOD DRIVE  
 BOW, NH 03304  
 P: 603-216-1573

MISSISSIPPI FACILITY  
 53 W L RUNNELS IND DR  
 HATTIESBURG, MS 39401  
 P: 601-584-7550

NEW JERSEY FACILITY  
 2960 WOODBRIDGE AVE  
 EDISON, NJ 08837  
 P: 732-662-6200