

400S125-15 (Standard Punch)

Product Line: 400EDS125-15- The Edge™ 25 (15 mil)

Coating: G40 (standard), G60 (special order)



Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	4 in.	Yield Strength, Fy	50 ksi
Flange Width	1.25 in.	Design Thickness	0.0153 in.
Lip Length	.350 in.	Min. Steel Thickness	0.0145 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.1032
Weight (lb/ft)	Linear weight per foot	0.351
I _x (in ⁴)	Moment of inertia about the x-axis	0.2485
S _x (in ³)	Section modulus about the x-axis	0.1243
R _x (in)	Radius of gyration about the x-axis	1.552
I _y (in ⁴)	Moment of inertia about the y-axis	0.0181
R _y (in)	Radius of gyration about the y-axis	0.4185

EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0446
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.1911
S _{xe} (in ³)	Effective section modulus (x-axis)	0.0795
Ma (in-k)	Allowable moment capacity	1.9871
V _y (lb)	Allowable shear force in web	75

TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0077
C _w (in ⁶)	Warping constant	0.0555
X _o (in)	Distance from shear center to centroid	0.7436
R _o (in)	Polar radius of gyration	1.7711
Beta	Torsional Flexural Constant	0.8237

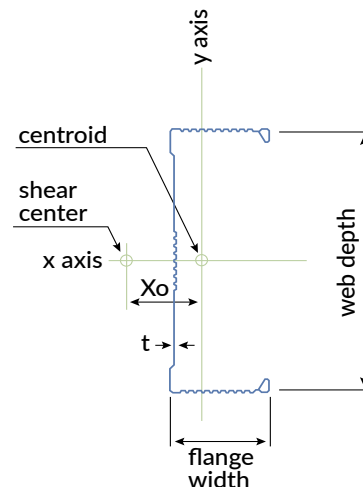

Non-structural punchout first punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.



CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- Complies with AISI S100-16 (2020) w/S2-20. *Effective properties incorporate the strength increase from the cold work of forming*
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U419, V438, V489, V498, W433, W440
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure.
- 3rd party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us

NEW HAMPSHIRE FACILITY
 12 TALLWOOD DRIVE
 BOW, NH 03304
 P: 603-216-1573

MISSISSIPPI FACILITY
 53 W L RUNNELS IND DR
 HATTIESBURG, MS 39401
 P: 601-584-7550

NEW JERSEY FACILITY
 2960 WOODBRIDGE AVE
 EDISON, NJ 08837
 P: 732-662-6200