

gripSTIK® 1/2" Vinyl L-Trim

gripSTIK® 1/2" Vinyl L-Trim provides a sharp edge at door, window, ceiling and other terminations. The many perforations and raised shoulder enhance strong compound adhesion and provide a flush finish. No primer is required for this impact resistant trim. Easy to cut with shears, knife or fine-tooth hacksaw. Won't rust.

Product Data and Ordering Information

Material: Extruded rigid vinyl; contains no asbestos
Part Numbers: LT5VYL

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
10'	80	48	800

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips gripSTIK® MAX-Flex® 3/4" Bullnose Archway meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM D 1784 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds
- ASTM D 3678 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Interior- Profile Extrusions

SDS and other technical information available at www.phillipsmfg.com

Patents

U.S. Patents 6,295,776 and 6,691,476

LEED Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

Storage

Avoid damage and store in a covered area away from direct sunlight.

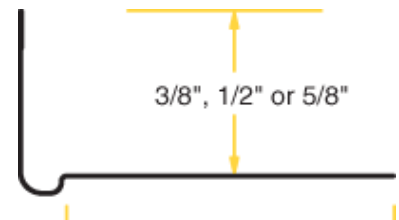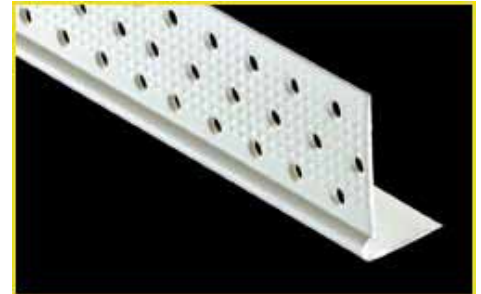

Also available in
3/8" and 5/8"

Drawing not to scale



Steel Framing Alliance™



American
Iron and Steel
Institute

