


SOLID BLOCKING: BETWEEN EVERY OTHER JOIST. ALL (4) TABS MUST BE DIRECTLY ATTACHED TO JOIST FLANGES USING MIN. (1) SCREW

BLOCKING BETWEEN EVERY OTHER JOIST:
WHEN STRUCTURAL SHEATHING IS APPLIED OVER THE TOP OF JOISTS WITH CONNECTIONS THAT WILL RESTRAIN THE TOP FLANGE, BLOCKING WILL ONLY NEED TO BE INSTALLED BETWEEN EVERY OTHER JOIST.

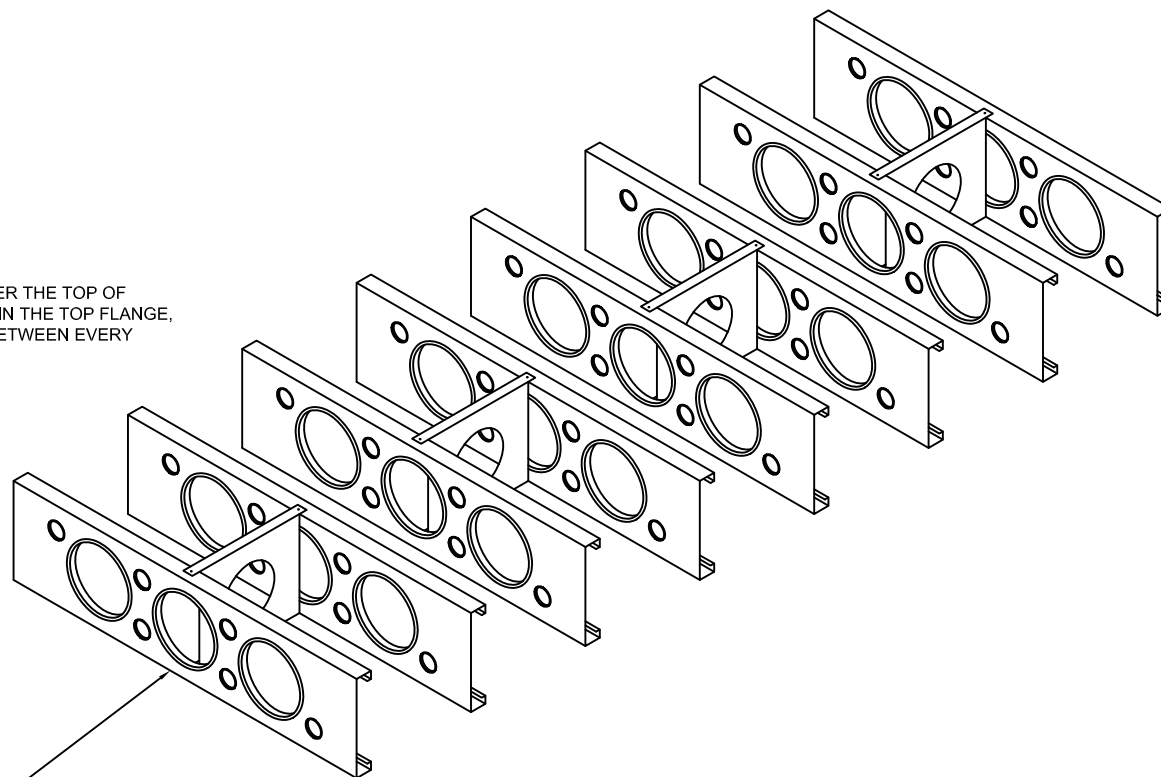

STRAPPING MAY BE INSTALLED ACROSS THE BOTTOM OF ALL JOIST, BUT IS NOT REQUIRED

ALL SCREWS MIN #10 DIAMETER

JOIST BRIDGING: BLOCKING EVERY OTHER SPACE