


NOTE: IF A PIECE OF BLOCKING NEEDS TO BE LEFT OUT FOR PLUMBING OR OTHER SERVICES, THIS IS ACCEPTABLE AS LONG AS THE JOISTS ON EITHER SIDE OF THE LEFT-OUT BLOCKING ARE RESTRAINED BY BLOCKING FROM THE OTHER SIDE.

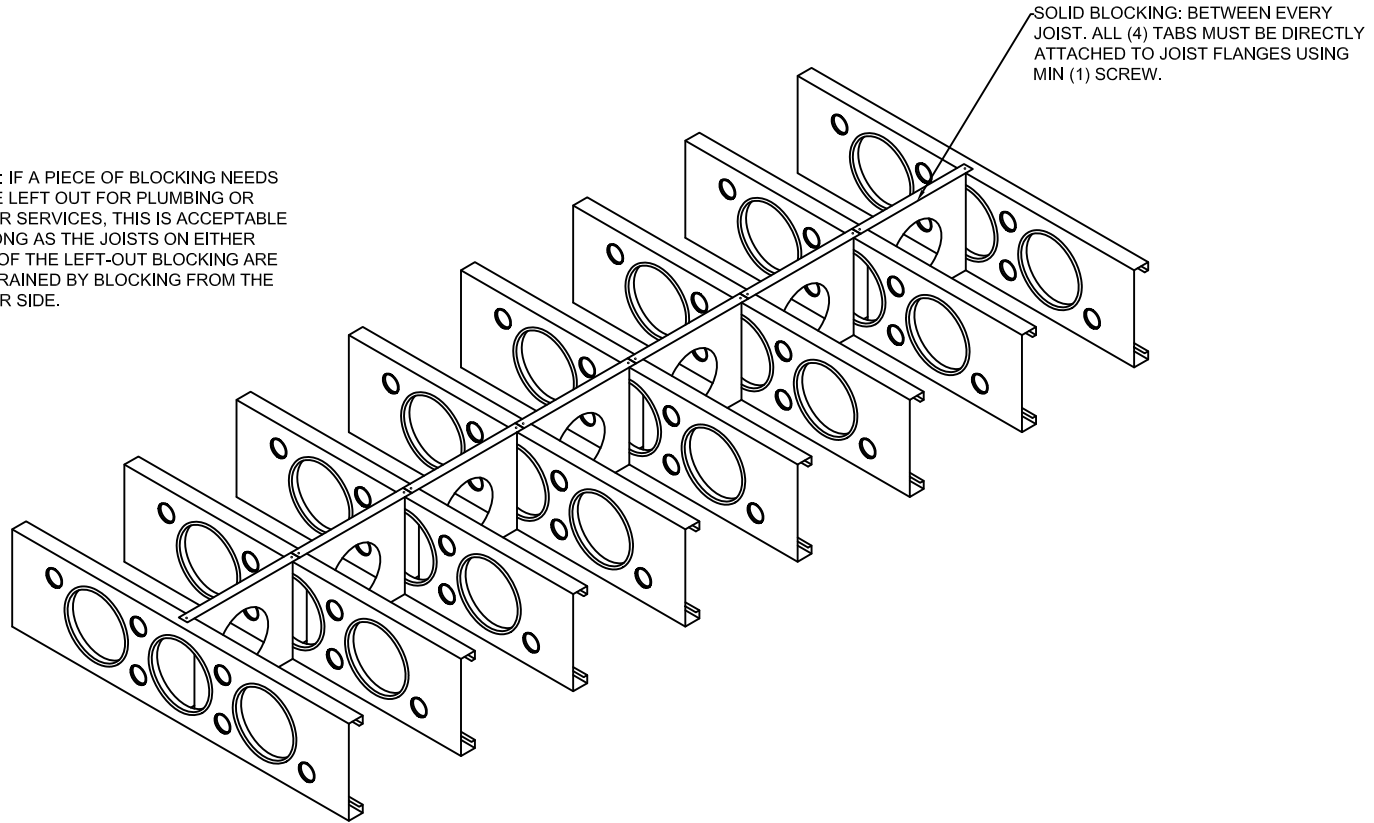

BLOCKING MUST BE PERPENDICULAR TO JOISTS.
BLOCKING MAY BE OFFSET UP TO 2" EITHER SIDE OF BLOCKING LINE.

ALL SCREWS MIN #10 DIAMETER

SOLID BLOCKING OPTION: BETWEEN EVERY JOIST