PRODUCT SUBMITTAL SHEET


For more information or questions, please contact:
Super Stud: technical@buysuperstud.com
EB Metal US: technical@ebmetal.us

362S137-54 (Standard Punch)

Product Description: 3-5/8" Stud 16GA (1-3/8" Flange, 54 mil)


Coating: G60 (standard), G90 (Available)


Specification Section: 05.40.00 (Cold-Formed Metal Framing)

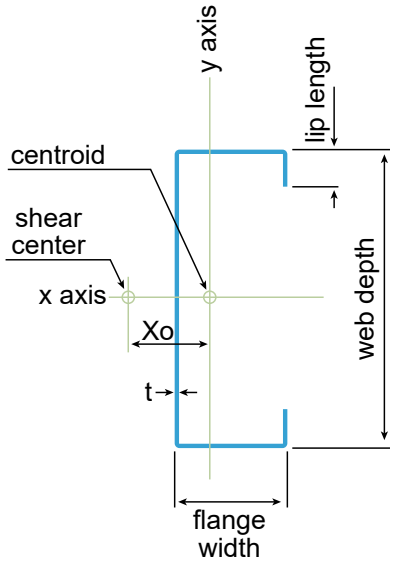

GEOMETRIC PROPERTIES			
Web Depth	3.625 in.	Yield Strength, Fy	50 ksi
Flange Width	1.375 in.	Design Thickness	0.0566 in.
Lip Length	0.375 in.	Min. Steel Thickness	0.0538 in.

GROSS PROPERTIES		
Area (in²)	Total cross-sectional steel area	0.379
Weight (lb/ft)	Linear weight per foot	1.29
Ix (in⁴)	Moment of inertia about the x-axis	0.756
Sx (in³)	Section modulus about the x-axis	0.417
Rx (in)	Radius of gyration about the x-axis	1.415
Iy (in⁴)	Moment of inertia about the y-axis	0.091
Ry (in)	Radius of gyration about the y-axis	0.490
EFFECTIVE PROPERTIES		
Ix (in³)	Effective moment of inertia (x-axis)	0.756
Sx (in³)	Effective section modulus (x-axis)	0.392
Ma (in-k)	Allowable bending moment-effective section modulus	11.73
Mad (in-k)	Allowable bending moment-distortional bucking	11.05
Va_g (lb)	Allowable shear force in web	3372
Va_{net} (lb)	Allowable strong axis sheer at punchout	1016
TORSIONAL PROPERTIES		
J x 1000 (in⁴)	St. Venant torsional constant	0.405
Cw (in⁶)	Warping constant	0.251
Xo (in)	Distance from shear center to centroid	-0.978
m (in)	Distance from shear center to mid-plane of web	0.601
Ro (in)	Polar radius of gyration	1.786
Beta	Torsional Flexural Constant	0.700



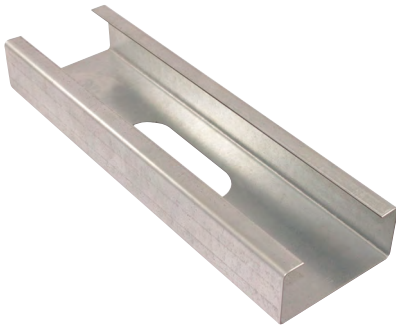

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Codes & Standards:

- **Structural Members**
  - ASTM C955
  - AISI S240
  - Installed per ASTM C1007
- **Material Standards**
  - ASTM A1003/A1003M
  - ASTM A653/A653M
- **Design Standards**
  - AISI S100-16 (2020) w/S2-20
- **Building Codes**
  - International Building Code (IBC) 2006–2024

- **Sustainability & Compliance:**
  - SFIA Quality Certified Manufacturing
  - Industry-Wide EPD Participant
  - HPD Documentation Available Upon Request
  - LEED Documentation Available Upon Request
  - Buy America / Build America (BABA) Documentation Available Upon Request
  - Manufactured in USA

NEW HAMPSHIRE | NEW JERSEY | MISSISSIPPI
Stronger **Together.**