

162T200-15 Track



Product Line: 162EDT200-15- The Edge™ 25 (15 mil)

Coating: G40 (standard), G60 (special order)

Specification Section: 09.22.16 (Non-Structural Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	1.625 in.	Yield Strength, Fy	50 ksi
Leg Width	2 in.	Design Thickness	0.0153 in.
		Min. Steel Thickness	0.0145 in.

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.0870
Weight (lb/ft)	Linear weight per foot	0.296
I _x (in ⁴)	Moment of inertia about the x-axis	0.0519
S _x (in ³)	Section modulus about the x-axis	0.0595
R _x (in)	Radius of gyration about the x-axis	0.773
I _y (in ⁴)	Moment of inertia about the y-axis	0.0382
R _y (in)	Radius of gyration about the y-axis	0.6632
EFFECTIVE PROPERTIES		
Area (in ²)	Effective area	0.0204
I _{xe} (in ³)	Effective moment of inertia (x-axis)	0.0211
S _{xe} (in ³)	Effective section modulus (x-axis)	0.0160
Ma (in-k)	Allowable moment capacity	0.3200
V _y (lb)	Allowable shear force in web	193
TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.0068
C _w (in ⁶)	Warping constant	0.0206
X _o (in)	Distance from shear center to centroid	1.5745
R _o (in)	Polar radius of gyration	1.8751
Beta	Torsional Flexural Constant	0.2949

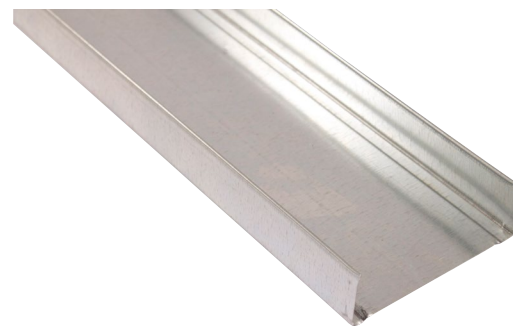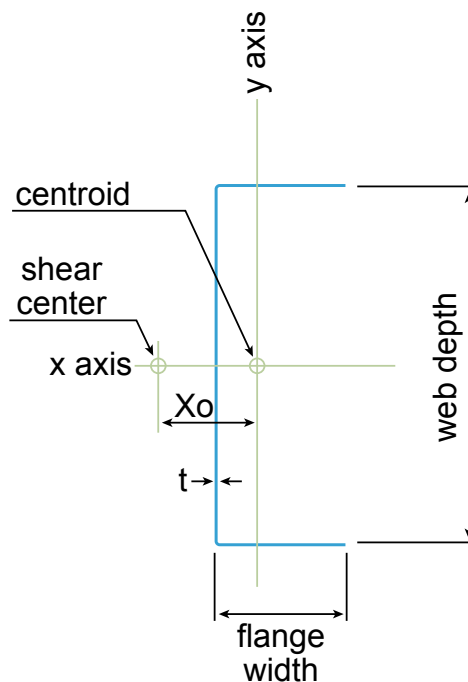

CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006 – 2024
- Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming
- Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized coating: ASTM A653/A653M or equivalent
- UL Designs: U419, V438, V489, V498, W433, W440
- Tested in accordance with ASTM E119; ANSI/UL 263
- Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202
- Meets ASTM C754 when installed properly in structure

For LEED Letter requests please submit through: www.buysuperstud.com