



Super Stud Building Products - Product Submittal

Technical Services: technical@buysuperstud.com

800-477-7883
buysuperstud.com

New Jersey
2960 Woodbridge Avenue
Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr
Hattiesburg, MS 39401
601-584-7550

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

1200S250-97 (50ksi) Standard Punch

97mil (12 ga) Coating: G60 (standard), G90 (special order)

Geometric Properties

Web Depth	12 in	Yield Strength, F_y	50 ksi
Flange Width	2.5 in	Ultimate, F_u	65 ksi
Lip Length	0.625 in	Punchout Width	1.5 in
Design Thickness	0.1017 in	Punchout Length	4.0 in
Min. Steel Thickness	0.0966 in		

Gross Section Properties

Cross Sectional Area (A)	1.7791 in ²
Product Weight per Linear Foot	6.0489 lb/ft
Moment of Inertia (I_x)	34.0212 in ⁴
Section Modulus (S_x)	5.6702 in ³
Radius of Gyration (r_x)	4.3729 in
Weak Axis Moment of Inertia (I_y)	1.1238 in ⁴
Weak Axis Radius of Gyration (r_y)	0.7948 in
Depth-to-Thickness Ratio (h/t)	113

Effective Section Properties, Strong Axis

Effective Area (A_e)	0.8548 in ²
Moment of Inertia for Deflection (I_{xe})	31.8834 in ⁴
Section Modulus (S_{xe})	4.9975 in ³
Allowable Bending Moment (M_a)	149.6263 in-k
Allowable Shear Force in Web (at Punchout) (V_y)	7,410 lb

Torsional Properties

St. Venant Torsion Constant ($J \times 1000$)	6.1338 in ⁴
Warping Constant (C_w)	30.6000 in ⁶
Distance from Shear Center to Neutral Axis (X_o)	1.3150 in
Radius of Gyration (r_o)	4.6350 in
Torsional Flexural Constant (Beta)	0.9195

Codes and Standards

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC): 2006 – 2024

Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming

Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M

Galvanized coating: ASTM A653/A653M


Nonstructural: Members and tolerances: ASTM C645; AISI S220, AISI S201, AISI S202

Meets ASTM C754 when installed properly in structure.

Structural: Members and tolerances: ASTM C955; AISI S240, AISI S201, AISI S202

Meets ASTM C1007 when installed properly in structure.

3rd party Certification

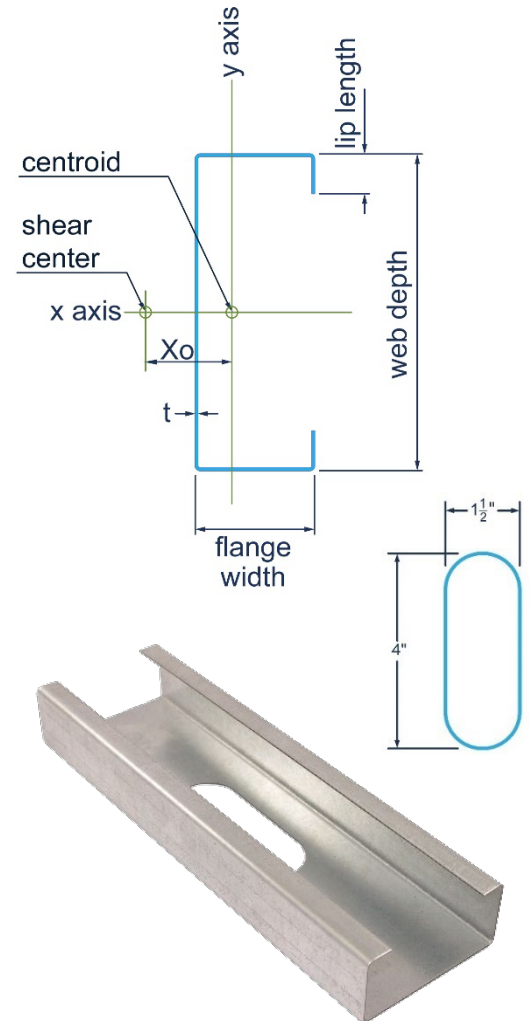

Structural Punchout

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Custom stiffened punchouts are available at tighter spacing to reduce thermal transmittance and increase accessibility. Contact Technical Services for additional punchout information.

Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit



© 2025 Super Stud Building Products