

Super Joist [SJ]

Product Name: 1200SJ200-54

Material and Shape Property Notes:

Design Thickness: 0.0566"
Minimum Thickness: 0.0538"
Mil Thickness: 54 mils
Gauge 16
Flange Width 2"
Web Depth 12.0"
Stiffening Lip Lengths: 5/8"
Corrosion Protection: G60 (standard) G90 (available)
Yield Strength: 50 kips per square inch (KSI) minimum

Product Application & Attributes:

Large stiffened punchouts in joist members provide industry-best accessibility along the length of the web, accommodating all trade installations. In addition to the large reinforced punchouts, SuperMAXX Joists have flanges with double returns for superior strength and stiffness that dramatically increase spans and capacities.

Section Properties:

Gross Section Properties:

Cross Section Area (**A**): 0.952 in²
Member Weight 3.239 pounds per foot
Moment of Inertia, strong axis (**I_x**) 17.647 in⁴
Radius of Gyration, strong axis (**r_x**) 4.306 in.
Moment of Inertia, weak axis (**I_y**) 0.394 in⁴
Radius of Gyration, weak axis (**r_y**) 0.643 in.

Effective Section Properties:

Effective Moment of Inertia (**I_{x eff}**) 17.730 in⁴
Effective Section Modulus (**S_{x eff}**) 2.621 in³
Allowable Moment (**M_a**) 78.47 inch-kips


Torsional Properties:

St. Venant Torsional Constant (**J x 1000**) 0.9265 in⁴
Warping Constant (**C_w**) 11.12 in⁶
Polar Radius of Gyration (**r_o**) 4.47 in
Distance of centroid from shear center (**X_o**) -1.02 in
Beta 0.9479


Codes & Standards:

Super Stud products comply with the applicable provisions of the following: International Building Code (IBC) 2006 - 2021
Sheet Steel: ASTM A1003 and ASTM A653
Galvanized Coating: ASTM A653
Members & Tolerances: ASTM C955 and AISI S240
Meets ASTM C1007 when installed properly in structure
3rd Party Certification: Manufacturing verified & inspected by Home Innovation Research Labs, Inc.

SUPERJOIST




Super Joist has a single flange return

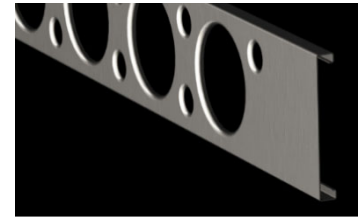

Super Joist & SuperMAXX Hole Pattern: 8" – 18" Web Depth

Joist Member Hole Sizing & Spacing

A	B	C	D	E
Section Web Depth (in.)	Large Hole Diameter (in.)	Large Hole Spacing (in. O.C.)	Small Hole Diameter (in.)	Min. Distance from end to center of First Large Hole (in.)
12	8.25	12	2.25	33
14	8.25	12	2.25	33

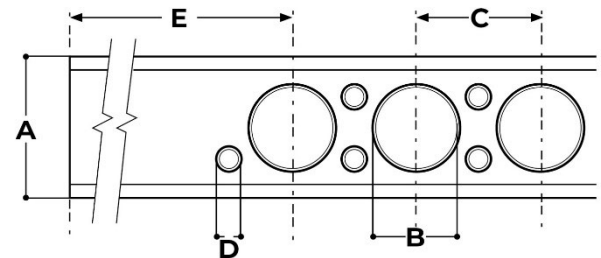

1-5/8", 2", 2-1/2", 3, 3-1/2"

