

Product Category: Structural Metal Stud Framing: Specification Section 05 40 00
Available Coatings: G60 (standard); or G90 **Yield Strength:** 50 ksi
Product Name: 16TW14 **AISI Nomenclature:** 1600T200-68
Product Description: 16 inch 14 gauge track member with 2 inch flanges

Material and Shape Property Notes:

Thickness: Design: 0.0713" • Minimum: 0.0677" • Designation: 68 mil • Equivalent Gauge: 14
Flange width: 2" • Web Depth: 16"

SECTION PROPERTIES

Gross Section Properties:


Cross Section Area (**A**): 1.4249 in²
Member Weight: 4.8447 pounds per foot
Moment of Inertia, strong axis (**I_x**): 42.9150 in⁴
Radius of Gyration, strong axis (**R_x**): 5.4880 in.
Moment of Inertia, weak axis (**I_y**): 0.3080 in⁴
Radius of Gyration, weak axis (**R_y**): 0.4650 in.

Effective Section Properties:^[1]

Effective Section Modulus (**S_{x eff}**): 2.8071 in³
Allowable Bending Moment (**M_a**): 84.0460 inch-kips
Gross Allowable Shear (**V_a**): 2.0290 kips

Torsional Properties:


St. Venant Torsional Constant (**J x 1000**): 2.4146 in⁴
Warping Constant (**C_w**): 15.9900 in⁶
Polar Radius of Gyration (**R_o**): 5.5420 in
Distance from shear center (**X_o**): -0.6130 in
Beta (**β**): 0.9878

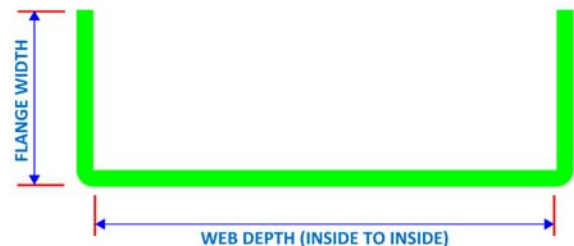

CODES & STANDARDS

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC) 2006 - 2015
Sheet Steel: ASTM A1003 & ASTM A653
Galvanized Coating: ASTM A653
Members & Tolerances: ASTM C955
Meets ASTM C1007 when installed properly in structure
3rd Party Certification: Manufacturing verified & inspected
by Home Innovation Research Labs, Inc.



[1] Where "NC" appears, the effective properties have not been calculated, due to limits in the American Iron and Steel Institute (AISI) North American Specification for the Design of Cold-Formed Steel Structural Members (AISI S100).

The Super Stud Building Products Family of Companies