



800-477-7883
buysuperstud.com

Super Stud Building Products

Technical Services: technical@buysuperstud.com

New Jersey
2960 Woodbridge Avenue Edison, NJ 08837
732-662-6200

Mississippi
53 W L Runnels Industrial Dr Hattiesburg, MS 39401
601-584-7550

SUPERMAXX STUD

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

600SMX350-43 (33ksi) Standard Punch

43mils (18ga) Coating: CP60 (G60) Standard or CP90 (G90) Available

Geometric Properties

Web Depth	6 in	Yield Strength, F_y	33 ksi
Flange Width	3.5 in	Ultimate, F_u	45 ksi
Design Thickness	0.0451 in	Min. Steel Thickness	0.0428 in
First Lip:	1.125 in	Second Lip:	0.5 in

Gross Section Properties

Cross Sectional Area (A)	0.7098 in ²
Product Weight per Linear Foot	2.4133 lb/ft
Moment of Inertia (I_x)	4.2219 in ⁴
Section Modulus (S_x)	1.4073 in ³
Radius of Gyration (r_x)	2.4389 in
Weak Axis Moment of Inertia (I_y)	1.3858 in ⁴
Weak Axis Radius of Gyration (r_y)	1.3973 in
Depth-to-Thickness Ratio (h/t)	128

Effective Section Properties, Strong Axis

Effective Area (A_e)	0.4155 in ²
Moment of Inertia for Deflection (I_{xe})	3.7136 in ⁴
Section Modulus (S_{xe})	1.1394 in ³
Allowable Bending Moment (M_a)	22.5154 in-k
Allowable Shear Force in Web (at Punchout) (V_y)	1,240 lb

Torsional Properties

St. Venant Torsion Constant ($J \times 1000$)	0.4812 in ⁴
Warping Constant (C_w)	15.0760 in ⁶
Distance from Shear Center to Neutral Axis (X_o)	3.4104 in
Radius of Gyration (r_o)	4.4195 in
Torsional Flexural Constant (Beta)	0.4045

Codes and Standards

Super Stud products comply with the applicable provisions of the following:

International Building Code (IBC): 2006 – 2024

Complies with AISI S100-16 (2020) w/S2-20. Effective properties incorporate the strength increase from the cold work of forming

Sheet steel: ASTM A1003/A1003M; ASTM A653/A653M


Galvanized coating: ASTM A653/A653M

Members and tolerances: ASTM C955; AISI S240, AISI S201, AISI S202

Meets ASTM C1007 when installed properly in structure.

3rd party Certification

SuperMAXX Joists have flanges with double returns for superior strength and stiffness that dramatically increase spans and capacities.

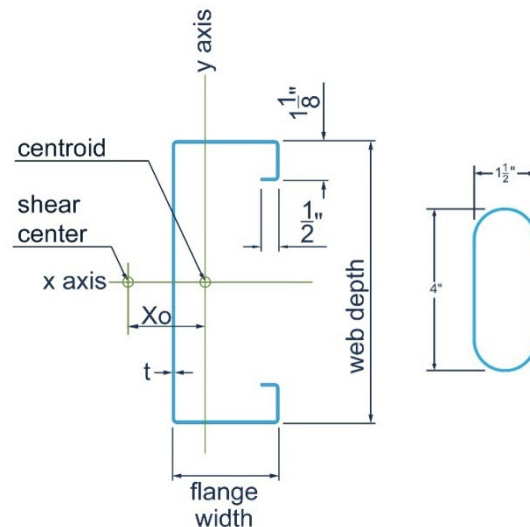


Two hole pattern options Standard Structural Punch

First oval punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

Maxx Punch

Only available in 6" and 8" studs. First oval punchout is centered at 12" from beginning of member. Three reinforced circular holes 6" o.c. follow and pattern repeats. Oval punchouts are at 24" o.c. Center of last punch out is no less than 12" from end of member.

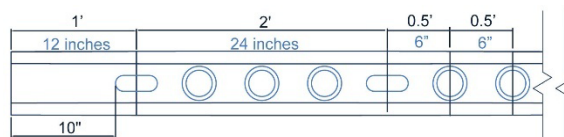

Sustainability

For LEED letters contact Technical Services at technical@buysuperstud.com or visit

<https://www.buysuperstud.com/specs-resources/sustainability-and-green-building>



SMX © 2025 Super Stud Building Products