

925T125-43¹ Track

Product Description: 9-1/4" Track 18GA (1-1/4" Leg, 43mil)



Coating: G60 (standard), G90 (special order)

Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	9.250 in.	Yield Strength, F _y	33 ksi
Leg Width	1.250 in.	Design Thickness	0.0451 in.
		Min. Steel Thickness	0.0428 in.

**1 Web-height to thickness ratio exceeds 200. Web stiffeners are required at all support points and concentrated loads.*

GROSS PROPERTIES		
Area (in ²)	Total cross-sectional steel area	0.530
Weight (lb/ft)	Linear weight per foot	1.80
I _x (in ⁴)	Moment of inertia about the x-axis	5.439
S _x (in ³)	Section modulus about the x-axis	1.156
R _x (in)	Radius of gyration about the x-axis	3.205
I _y (in ⁴)	Moment of inertia about the y-axis	0.047
R _y (in)	Radius of gyration about the y-axis	0.298
EFFECTIVE PROPERTIES		
I _x (in ³)	Effective moment of inertia (x-axis)	4.903
S _x (in ³)	Effective section modulus (x-axis)	0.752
M _a (in-k)	Allowable bending moment-effective section modulus	14.89
V _a (lb)	Allowable shear force in web	890
TORSIONAL PROPERTIES		
J x 1000 (in ⁴)	St. Venant torsional constant	0.359
C _w (in ⁶)	Warping constant	0.817
X _o (in)	Distance from shear center to centroid	-0.399
m (in)	Distance from shear center to mid-plane of web	0.270
R _o (in)	Polar radius of gyration	3.243
Beta	Torsional Flexural Constant	0.985

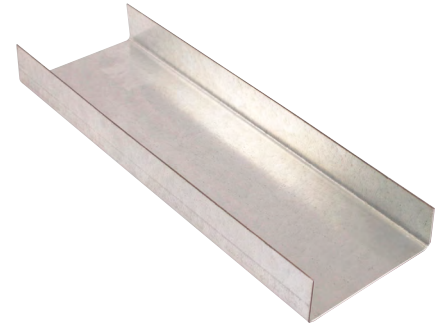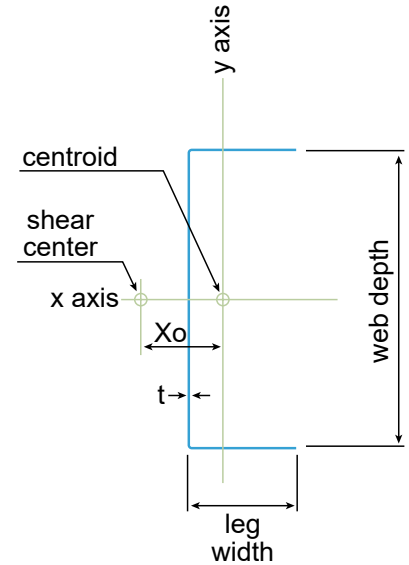

CODES AND STANDARDS:

Super Stud/EB Metal US products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

Additional Standards:

- AISI S201; AISI S202

3rd Party Certification

For LEED Letter requests please submit through:
www.buysuperstud.com or www.ebmetal.us