

## 800S137-97 (Standard Punch)

Product Description: 8" Stud 12GA (1-3/8" Flange, 97 mil)

Coating: G60 (standard), G90 (special order)



Specification Section: 05.40.00 (Cold-Formed Metal Framing)

GEOMETRIC PROPERTIES			
Web Depth	8 in.	Yield Strength, $F_y$	50 ksi
Flange Width	1.375 in.	Design Thickness	0.1017 in.
Lip Length	0.375 in.	Min. Steel Thickness	0.0966 in.

GROSS PROPERTIES		
Area (in <sup>2</sup> )	Total cross-sectional steel area	1.093
Weight (lb/ft)	Linear weight per foot	3.72
$I_x$ (in <sup>4</sup> )	Moment of inertia about the x-axis	8.601
$S_x$ (in <sup>3</sup> )	Section modulus about the x-axis	2.150
$R_x$ (in)	Radius of gyration about the x-axis	2.806
$I_y$ (in <sup>4</sup> )	Moment of inertia about the y-axis	0.170
$R_y$ (in)	Radius of gyration about the y-axis	0.394

EFFECTIVE PROPERTIES		
$I_x$ (in <sup>3</sup> )	Effective moment of inertia (x-axis)	8.601
$S_x$ (in <sup>3</sup> )	Effective section modulus (x-axis)	2.143
$M_a$ (in-k)	Allowable bending moment-effective section modulus	73.24
$M_{ad}$ (in-k)	Allowable bending moment-distortional buckling	65.11
$V_a$ (lb)	Allowable shear force in web	10888
$V_{a_{net}}$ (lb)	Allowable strong axis shear at punchout	5940

TORSIONAL PROPERTIES		
$J \times 1000$ (in <sup>4</sup> )	St. Venant torsional constant	3.767
$C_w$ (in <sup>6</sup> )	Warping constant	2.349
$X_o$ (in)	Distance from shear center to centroid	-0.630
$m$ (in)	Distance from shear center to mid-plane of web	0.423
$R_o$ (in)	Polar radius of gyration	2.902
Beta	Torsional Flexural Constant	0.953

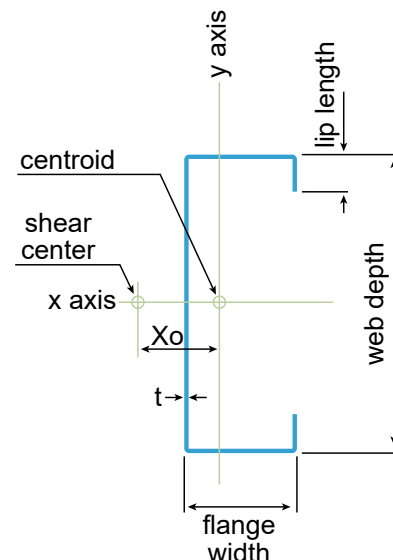

First punchout is centered 12" from beginning of member; subsequent punchouts are 24" on center (o.c.). Center of last punchout is no less than 12" from end of member.

### CODES AND STANDARDS:

Super Stud products comply with the applicable provisions of the following:

- International Building Code (IBC): 2006–2024
- AISI S100-16 (2020) w/S2-20 (effective properties include cold-work strength increase)
- Sheet Steel: ASTM A1003/A1003M; ASTM A653/A653M
- Galvanized Coating: ASTM A653/A653M

### Structural Members:

- ASTM C955; AISI S240
- Installed per ASTM C1007

### Additional Standards:

- AISI S201; AISI S202

### 3rd Party Certification

For LEED Letter requests please submit through: [www.buysuperstud.com](http://www.buysuperstud.com)